5MP HD 지능형 ColorHunter 고정형 아이볼 네트워크 카메라

IPC3615SE-ADF28(40)KM-WL-I0





주요 특징

- 5MP, 1/2.7" CMOS 센서로 고화질 이미지 제공
- 5 MP (2880 × 1620)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG
- 지능형 경계 보호: 크로스 라인, 침입, 구역 진입, 구역 이탈 감지 포함
- 대상 분류 기반 스마트 침입 방지로 나뭇잎, 새, 조명에 의한 오경보를 크게 줄이고 사람, 자동차, 비자동차에 정확히 집중
- 지능형 얼굴 캡처
- 지능형 피플 카운팅 및 군중 밀집도 모니터링
- ColorHunter 기술로 24시간 풀컬러 이미지 보장
- 120dB 트루 WDR 기술로 강한 조명 환경에서도 선명한 이미지 구현

- 9:16 복도 모드 지원
- 내장 마이크
- MicroSD, 최대 1TB 지원
- IP67 보호 등급
- PoE 전원 공급 지원

사양

Model	IPC3615SE-ADF28KM-WL-I0	IPC3615SE-ADF40KM-WL-I0
카메라		
최대 해상도	5 MP	
센서	1/2.7" CMOS	
최저 조도	컬러: 0.001 Lux (F1.0, AGC 켜짐)	
셔터	자동/수동, 1초 ~ 1/100000초	
조정 각도	팬: 3° ~ 360°, 틸트: 0° ~ 80°, 회전: 3° ~ 360°	
S/N	>56 dB	
WDR	120 dB	
렌즈		
초점 거리	2.8 mm	4.0 mm
Iris Type	고정	
아이리스	F1.0	
화각(수평)	102.0°	80.2°
화각(수직)	53.4°	43.0°
화각(사각)	121.0°	94.7°

렌즈 유형	고정	
DORI		
DORI 거리(렌즈)	2.8 mm	4 mm
DORI 거리(감지)	63.0 m (206.7 ft.)	90.0 m (295.3 ft.)
DORI 거리(관찰)	25.2 m (82.7 ft.)	36.0 m (118.1 ft.)
DORI 거리(인식)	12.6 m (41.3 ft.)	18.0 m (59.1 ft.)
DORI 거리(식별)	6.3 m (20.7 ft.)	9.0 m (29.5 ft.)
조명		
보조 조명	웜라이트	
조명 거리(웜라이트)	30 m (98.4 ft.)	
조명 켜기/끄기 제어	자동/수동	
비디오		
비디오 압축	Ultra 265, H.265, H.264, MJPEG	
프레임 속도 - 서드 스트림	D1 (720 × 576), 최대 30 fps; 640 × 360, 최대 30 fps; 2CIF (704 × 288), 최대 30 fps; CIF (352 × 288), 최대 30 fps;	
H.264 코드 프로파일	Baseline profile, Main profile, High profile	
비디오 비트 전송률	128 Kbps ~ 16 Mbps	
U-code	지원	
OSD	최대 8개의 OSD	
프라이버시 마스크	최대 4개 영역	
ROI	지원	
비디오 스트림	트리플 스트림	

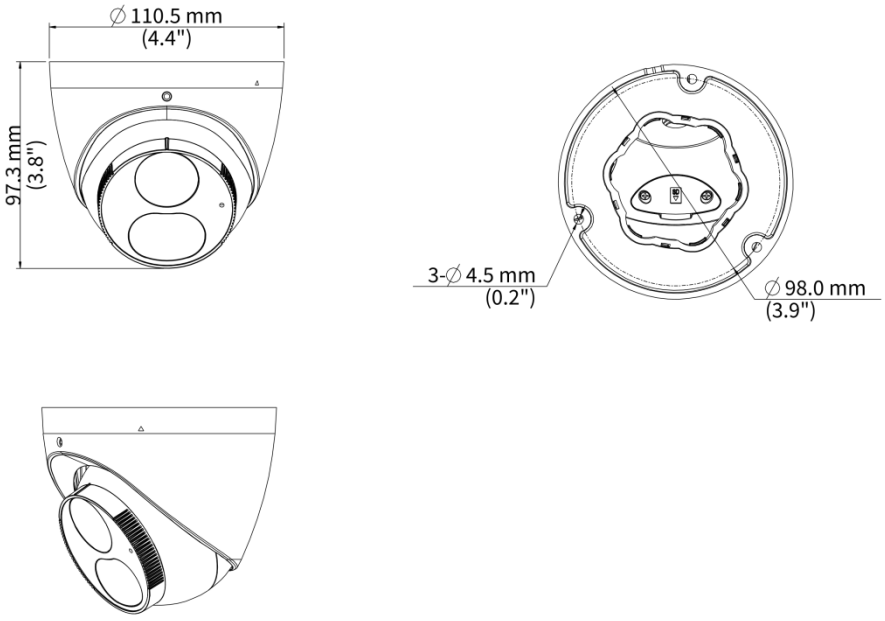
프레임 속도 - 메인 스트림	5 MP (2880 × 1620), 최대 30 fps; 4 MP (2560 × 1440), 최대 30 fps; 3 MP (2304 × 1296), 최대 30 fps; 1080P (1920 × 1080), 최대 30 fps; 720P (1280 × 720), 최대 30 fps
프레임 속도 - 서브 스트림	720P (1280 × 720), 최대 30 fps; D1 (720 × 576), 최대 30 fps; 640 × 360, 최대 30 fps
이미지	
스마트 조명	지원
화이트 밸런스	자동, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
디지털 노이즈 제거	2D/3D DNR
이미지 회전	보통, Flip Vertical, Flip Horizontal, 180°, 90°Clockwise, 90°Anti-clockwise
디워핑	N/A
HLC	지원
BLC	지원
디포그	디지털 디포그
지능형	
얼굴 캡처	지원
스마트 침입 방지	라인 침범 감지, 침입 감지, 구역 진입 감지, 구역 이탈 감지 (오경보 필터링 및 사람, 이륜차, 차량의 분류 지원)
통계 분석	N/A
피플 카운팅	인원 흐름 계산 및 군중 밀도 모니터링 지원
이벤트	
기본 감지	움직임 감지, 울트라 모션 감지, 변조 알람, 오디오 감지
기본 기능	워터마크, IP 주소 필터링, 액세스 정책, ARP 보호, RTSP 인증, 사용자 인증, HTTP 인증

오디오	
오디오 압축	G.711U, G.711A, AAC-LC
오디오 비트레이트	G.711U/G.711A: 64 kbps, AAC-LC: 128 kbps
양방향 오디오	N/A
억제	지원
샘플링 주파수	G.711U/G.711A: 8 kHz, AAC-LC: 8 kHz, 16 kHz, 48 kHz
저장 장치	
엣지 스토리지	MicroSD, up to 1 TB
네트워크 스토리지	ANR, NAS (NFS)
네트워크	
프로토콜	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, SSL/TLS, SSH
호환성 통합	ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK
사용자/호스트	Up to 32 users, 2 user levels: administrator and common user
보안	Password Protection, 강력한 비밀번호, HTTPS Encryption, Export Operation Logs, RTSP용 기본 및 다이제스트 인증, HTTP용 다이제스트 인증, TLS 1.2, ONVIF용 WSSE 및 다이제스트 인증
고객	EZStation, APP
웹 브라우저	플러그인 필요 라이브 뷰: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, 플러그인 불필요 라이브 뷰: Chrome 57+, Firefox 58+, Edge 16+
인터페이스	
오디오 I/O	N/A



알람 I/O	N/A
시리얼 포트	N/A
내장 마이크	지원
내장 스피커	N/A
WIFI	N/A
네트워크	1 × RJ45 10 M/100 M Base-TX Ethernet
비디오 출력	N/A
인증	
EMC	CE-EMC (EN 55032: 2015+A1:2020,EN 61000-3-3: 2013+A1: 2019,EN IEC 61000-3-2: 2019+A1: 2021,EN 55035: 2017+A11:2020) FCC (FCC CFR 47 part15 B, ANSI C63.4-2014)
안전성	CE LVD (EN 62368-1:2014+A11:2017) CB (IEC 62368-1:2014) UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)
환경	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
보호	IP67 (IEC 60529:1989+AMD1:1999+AMD2:2013)
일반	
전원	DC 12 V±25%, PoE (IEEE 802.3af)
전력 소비량	최대 7.5 W
전원 인터페이스	Ø5.5 mm 동축 전원 플러그
크기	Ø110.5 mm × 94.1 mm (Ø4.4" × 3.7") (Ø × H)
무게	0.44 kg (0.97 lb.)
재료	메탈
작업 환경	-30 ℃ ~ 60 ℃ (-22 ℉ ~ 140 ℉), 습도: ≤ 95% RH (비응결)
저장 환경	-30 ℃ ~ 60 ℃ (-22 ℉ ~ 140 ℉), 습도: ≤ 95% RH (비응결)

서지 보호	4 KV
초기화 버튼	N/A
웹 클라이언트 언어	20개 언어: 중국어 번체, 영어, 중국어 간체, 폴란드어, 독일어, 러시아어, 프랑스어, 한국어, 네덜란드어, 체코어, 포르투갈어(유럽), 포르투갈어(브라질), 일본어, 태국어, 터키어, 스페인어(라틴아메리카), 스페인어(유럽), 헝가리어, 이탈리아어, 베트남어

크기



액세서리

TR-JB03-G-IN Mini Dome Junction Box(Support Wiring From Behind)	**TR-A01-IN** NPT 3/4'' Waterproof Cable Gland	**TR-SE24-IN** Dome Pendent Mounting Pole 200mm
		
TR-SE24-A-IN Dome Pendent Mounting Pole 500mm	**TR-CM24-IN** Dome Pendent Mounting Bracket(Indoor)	**TR-JB07/WM03-G-IN-V2** Wall Mounting Assembling Bracket For Dome&Mini Dome&Plastic Turret Camera
		
TR-WM03-D-IN-V2 Wall Mounting Bracket For Dome&Mini Dome&Plastic Turret Camera	**TR-UC08-C-V2** Bullet&Dome Corner Mounting Bracket	**TR-UP06-C-IN-V2** Pole Mounting Bracket For Bullet Junction Box Only
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2023-2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.