

# ITS Overseas multi-lane speed radar

## RD107@A-6-OS



#### **Features**

- Support two-way trigger, retrograde capture
- Support formal and side loading;
- Adopt 24GHz MMIC technology, superior performance;
- High gain and low sidelobe microstrip antenna design technology can effectively avoid adjacent channel target interference.;
- Accurate ranging and speed measurement for multiple targets, accurate positioning;
- High-precision fixed-point capture, the position error is within 1 m, and the capture rate is above 99%.;
- Strong environmental adaptability, and the detection performance is not disturbed by external environment such as light, dust, rain and snow.

### **Specifications**


| Performance             | Description                                 |  |
|-------------------------|---|--|
| Number of lanes         | 6   |  |
| Vehicle capture rate    | ≥99%  |  |
| Speed measurement error | ≥100km/h (-1-0)km/h<br><100km/h(-0.5-0)km/h |  |
| Trigger Consistency     | ≤±0.5m                                      |  |
| Speed measurement range | 10~300 km/h                                 |  |
| Tracking distance       | 18~38m                                      |  |
| Mounting height         | 4~8m  |  |

1



| Lane width                | 2.75~5m adjustable |  |
|---------------------------|--------------------|--|
| Interface Characteristics | Description        |  |
| Power supply              | RS485              |  |
| Communication interface   | DC9~12V 0.3A       |  |
| General Features          | Description        |  |
| Weight                    | DC9~12V 0.3A       |  |
| Antenna beam 3dB width    | 48°*25°            |  |
| Working center frequency  | 24.05~24.25GHz     |  |
| Power waste               | ≤10W               |  |
| Operation temperature     | -40℃~70℃           |  |
| Working humidity          | 0-95%RH            |  |
| Protection grade          | IP66               |  |
| Dimensions (L×W×H)        | 205X221X191mm      |  |

#### **Dimensions**

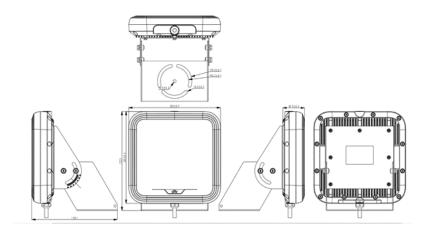

# **Ordering Info**

| Product Model | Config | Description   |
|---------------|--------|---|
| RD107         | A-6-OS | ITS Multi-target tracking and speed measurement radar(multi-lane),<br>With bracket,Can be powered by the camera 12V |

#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overse as business @uniview.com; global support @uniview.com

http://www.uniview.com

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

<sup>\*</sup>Product specifications and availability are subject to change without notice.





\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.