


# F/FTP Category 6A Cables

UV-F/FTP6A-300-BC23AWG-DCA-R-O

## Section View

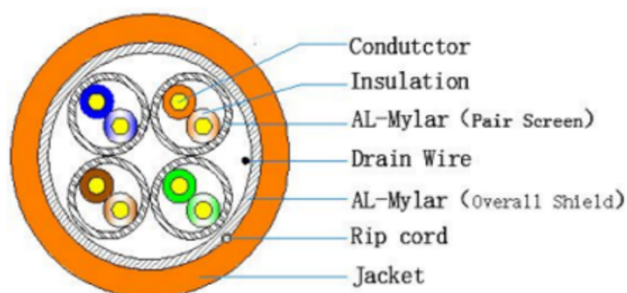

## Specifications

Model	UV-F/FTP6A-300-BC23AWG-DCA-R-O
Cable	
Product model	UV-F/FTP6A-300-BC23AWG-DCA-R-O
Product specification	Cat6A. F/FTP. 4×2×0.57mm CPR Dca
Test Standard	ISO/IEC11801 ED.2 ANSI/TIA-568-C.2
Packing length	305±1 m
Rip-cord	Yes
Ambient temperature	-20℃～75℃
Conductor	
Material	OFC
AWG	23
Nom.O.D.(mm)	0.57±0.005 mm
DC resistance	≤95Ω/km
Insulation	
Material	FPE
Thickness	0.21+0.03mm
Diameter	1.35±0.05 mm
Color	Blue/White- Blue,Green/White-Green,Orange/White-Orange,Brown/White-Brown

## Pitch

Offset pitch	≤25mm
Cable pitch	≤120mm

## Shield

Pair Screen	AL-Mylar 100% Coverage
Drain Wire	0.4± 0.01TC
Overall Shield	AL-Mylar 100% Coverage

## Sheath

Material	LSZH
Fire Resistance	CPR Dca
External O.D.	7.6±0.3 mm
Thickness	0.55±0.15 mm
Color	Orange
Tensile strength	>10 Mpa

## Surface Printing

Letter height	3.0±0.3 mm
Print error / Space	1±0.005 m
Color	Black

## Packing

Packing	Reel
Once packing dimension	400mm *200mm *240mm

## Ordering Info

Product Model	Description
UV-F/FTP6A-300-BC23AWG-DCA-R-O	Cat6a(FTP),305m,Overseas

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.