

Network Video Recorder NVR301-B-LP-IQ Series



Features

- Support Ultra 265/H.265/H.264 video formats
- Support 4/8/16-channel input
- Support Plug & Play with 4/8 independent PoE network interfaces
- Support HDMI and VGA simultaneous output
- Support up to 12 Megapixels resolution recording
- Support ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications


| Model | NVR301-04B-LP4-IQ | NVR301-08B-LP8-IQ | NVR301-16B-LP8-IQ |
|---------------------------------|--|--|---|
| Decoding | | | |
| Decoding Format | Ultra 265,H.265,H.264 | | |
| Decoding Capability | Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30 Smart On: 2 x 4K@30, 4 x 4MP@30 | Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 | Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30, 16 x 720P@30 Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30, 16 x 720P@30 |
| Decoding Capability Description | The resolution of each channel cannot exceed 8192 pixels in length and 4096 pixels in width | | |
| Audio Compression | G.711A, G.711U | | |
| Network | | | |
| Incoming Bandwidth | 80 Mbps | | |
| Outgoing Bandwidth | 80 Mbps | | |
| Remote Users | 128 | | |
| Protocols | TCP/IP, P2P, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, RTSP, IPv6, IPv4 | | |
| Browser (Plugin) | IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+ | | |
| Video/Audio Input | | | |
| IP Video Input | 4-ch | 8-ch | 16-ch |
| RCA Audio Input | 1-ch | | |
| Peripheral Input | | | |
| Ip Speaker | 16-ch | | |
| POS | All channels | | |
| Video/Audio Output | | | |
| HDMI Output | 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | | |
| VGA Output | 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | | |
| RCA Audio Output | 1-ch | | |
| Liveview Display | 1/4 | 1/4/6/8/9 | 1/4/6/8/9/16 |
| Corridor Mode Screen | 3/4 | 3/4/5/7/9 | 3/4/5/7/9/10/12/16 |
| Two-way Audio | | | |
| Two-way Audio | 1-ch,RCA(Using the audio input and output) | | |
| Snapshot | | | |
| FTP/Schedule/Event Snapshot | 4-ch snapshot (max. D1 (720 × 576) video resolution, with D1 snapshot resolution) | | |
| Recording | | | |
| Recording Resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF | | |
| Num of Concurrent Playback | 16-ch | | |
| Smart | | | |

| | | | |
|--------------------------------|---|--|--|
| Smart by IPC | All channels (up to 8 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), SIP, UMD, Traffic Monitoring | | |
| Smart by NVR | Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Ultra Motion Detection (UMD) | | |
| VCA Search | AcuSearch, AcuTrack, Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map | | |
| AcuSearch | All channels with UNV SIP/UMD Camera, Up to 4-ch with normal camera (UNV and Third-part brand, 4-ch 2MP, 2-ch 4MP, 1-ch 4K) | | |
| AcuTrack | All channels with UNV SIP/UMD Camera, Up to 4-ch with normal camera (UNV and Third-part brand, 4-ch 2MP, 2-ch 4MP, 1-ch 4K) | | |
| by NVR | Up to 4-ch with UNV Face Detection Camera Up to 1-ch with normal camera (UNV and Third-part brand, 1-ch 2MP) | Up to 8-ch with UNV Face Detection Camera Up to 1-ch with normal camera (UNV and Third-part brand, 1-ch 2MP) | Up to 8-ch with UNV Face Detection Camera Up to 1-ch with normal camera (UNV and Third-part brand, 1-ch 2MP) |
| Search by Image | Support | | |
| SIP by NVR with normal cameras | Up to 2-ch with normal camera (UNV and Third-part brand, 2-ch 2MP, 1-ch 4MP) | | |
| UMD by NVR with normal cameras | Up to 4-ch with normal camera (UNV and Third-part brand, 4-ch 2MP, 2-ch 4MP, 1-ch 4K) | | |
| Alarm | | | |
| General Alarm | Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection | | |
| Alert Alarm | IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal | | |
| GUI Language | | | |
| GUI Language | 38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian | | |
| Hard Disk | | | |
| SATA | 1 SATA Interfaces | | |
| Capacity | Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 35°C.) | | |
| External Interface | | | |
| Network Interface | 1 RJ45 10 M/100 M self-adaptive Ethernet Interface | | |
| USB | Rear panel: 1 × USB2.0, 1 × USB3.0 | | |
| RS485 | N/A | | |
| RS232 | N/A | | |
| Alarm In | N/A | | |
| Alarm Out | N/A | | |
| Power Supply | DC 48 V/1.35 A | DC 52 V/1.8 A | DC 52 V/1.8 A |

| | | | |
|---------------------------------|--|--|--|
| Power Switch | N/A | | |
| PoE | | | |
| PoE Interface | 4 RJ45 10 M/100 M self-adaptive Ethernet Interface | 8 RJ45 10 M/100 M self-adaptive Ethernet Interface | 8 RJ45 10 M/100 M self-adaptive Ethernet Interface |
| Max Power | Max 30W for single port,Max 50W in total | Max 30W for single port,Max 75W in total | Max 30W for single port,Max 75W in total |
| Supported Standard | IEEE 802.3at,IEEE 802.3af | | |
| Working Environment | | | |
| Working Temperature | -10 °C ~ + 55 °C (+14 °F ~ +131 °F) | | |
| Working Humidity | ≤ 90% RH (non-condensing) | | |
| Power Consumption (without HDD) | ≤ 12W | | |
| Dimensions | | | |
| Weight (without HDD) | ≤ 2.7Kg (6.0lb) | ≤ 4Kg (8.8lb) | ≤ 4Kg (8.8lb) |
| Height | 1U | | |
| Dimensions | 205mm × 212mm × 46mm (8.1"×8.3"×1.8") | 270mm × 212mm × 46mm (10.6"×8.3"×1.8") | 270mm × 212mm × 46mm (10.6"×8.3"×1.8") |
| Certification | | | |
| Certification | CE; FCC; UL; RoHS; WEEE | | |
| CE | EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035 | | |
| FCC | Part15 Subpart B | | |
| Compliance | | | |
| NDA Compliant | Support | | |

Dimensions

Aggregate product size diagram using NVR301-04B-LP4-IQ as an example

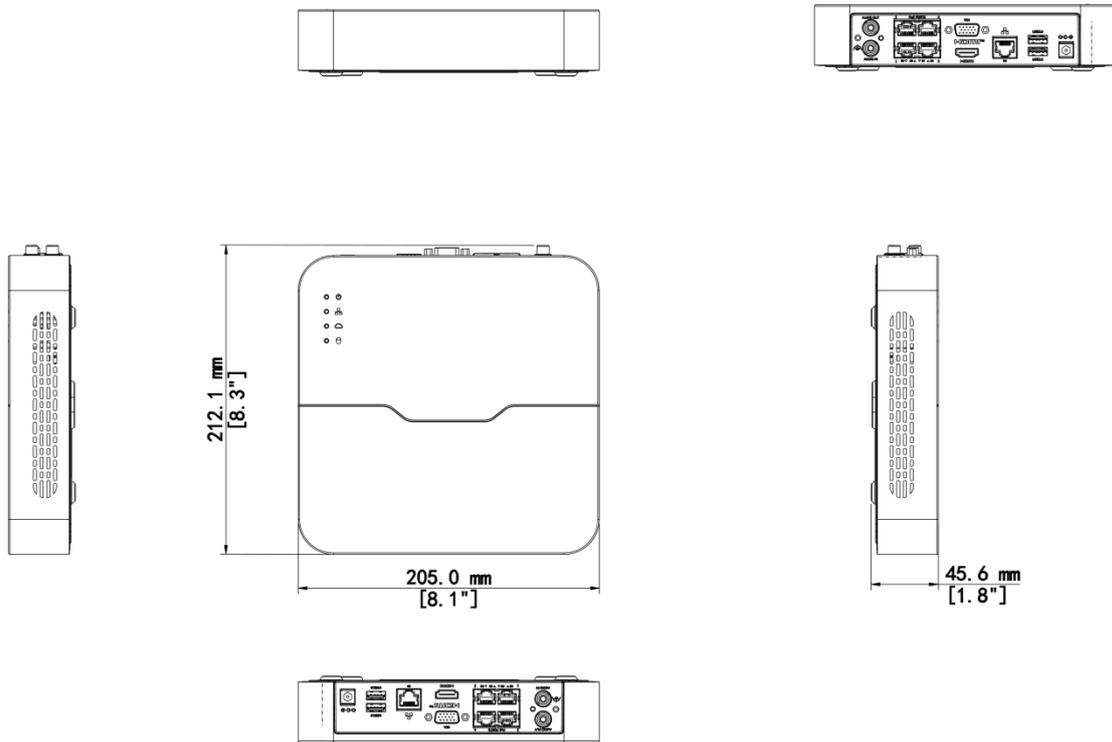

Zhejiang Uniview Technologies Co., Ltd.

- <http://www.uniview.com>
- overseasbusiness@uniview.com; globalsupport@uniview.com
- No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
*Despite our best efforts, technical or typographical errors may exist in this document.
Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.