# UNV

## **Infrared Strobe Light**

#### LAPM-IS16@A-F-OS



#### Features


- Elegant appearance, integrated structure design, safety and convenient.
- Supports synchronous video illumination.
- Uniform illumination delivers clear image, no smearing or overexposure.
- Pulse signal self-test, no need for setup, automatic high-frequency illumination based on the digital pulse signal of the camera unit.
- Wide voltage allows AC 176V to 264V mains power supply.
- All-weather operation, applicable to harsh environments.
- IP66 protection level, waterproof and dustproof.


#### Specifications


Model				
Model	LAMP-IS16@A-F-OS			
Structure				
Tail cable	1 x power input, 1 x strobe trigger input			
Power	30W			
Be in common use				
Weight	1.5 kg			
Ingress protection	IP66			
Bracket rotation angle	-90° to 90°			
Dimensions (L × W × H)	1159×230×61mm			
Power supply	200-240Vac 50/60Hz			
LED strobe				
Trigger mode	Level trigger, switch trigger			
Trigger frequency	100Hz			

unv		DATASHEET
Beam angle	0-40%	
Light type	Infrared strobe light	

### Dimensions

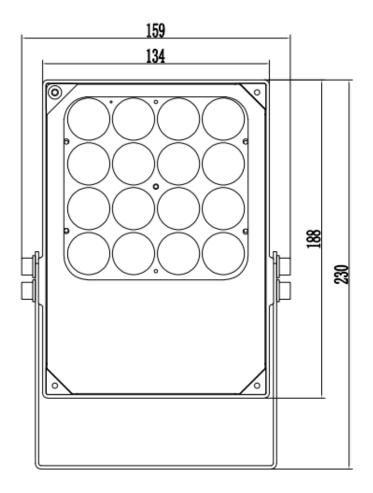



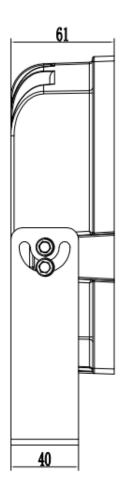



#### Accessories

TR-UP0627

Universal Pole Mounting Bracket(Elegant White,Diameter100-300mm,Domestic Version),Universal Type



#### Ordering Info

Product Model	Config	Description
LAMP-IS16	A-F-OS	Infrared Strobe Light (Overseas)

#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

 $\ensuremath{\mathbb{C}}$  2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.