


UNV-Link Pro connect Box


GCB01-B7



Specifications

Model	GCB01-B7
Interface	
Network	4 × RJ45 10 M/100 M Base-TX Ethernet Network Port 1 Support POE (IEEE802.3af) Output Network Port 4 Support PSE Voltage Test
Voltage Test	1 x PSE Voltage Test(PSE voltage detection Range: 1V~56V; IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt) 1 x DC voltage Test(DC voltage detection Range: 1V~56V)
Network	
Wi-Fi	2.4G Wi-Fi (IEEE802.11b/g/n)
Structure / Environment	
Battery Capacity	18650 lithium battery, 7500 mAH
Power Input	1 × DC 5 V/2 A max, type-c
Power Output	1 × DC 12 V/1 A output; 1 × DC 5 V/1 A output, type-A
General	
LED Indicator	System indicator, WiFi indicator, Battery indicator
Dimensions	130 × 85 × 33mm (5.1" × 3.3" × 1.3") (L x W x H)
Working Environment	-20 °C to 60 °C (-4 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Reset Button	Support

Dimensions

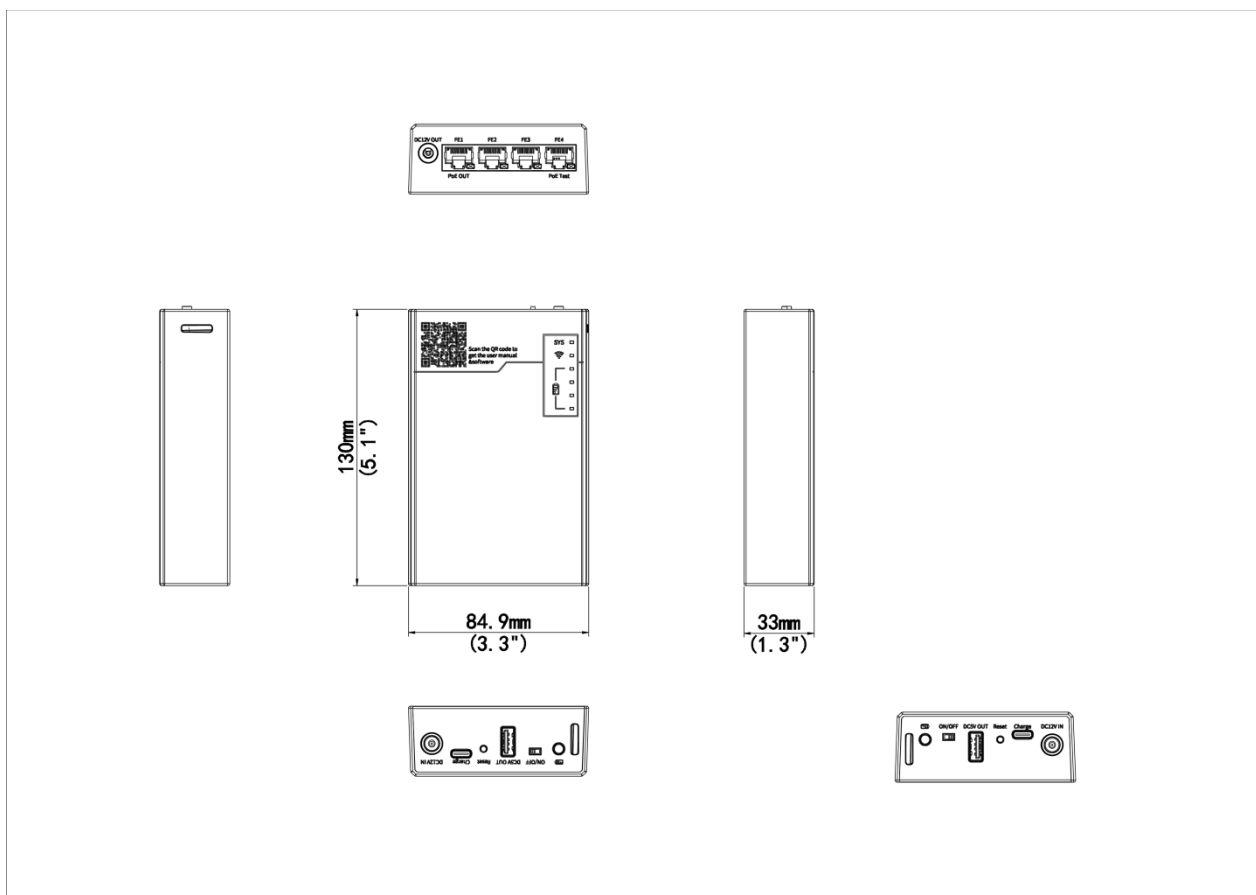

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China
(Zhejiang) Pilot Free Trade Zone, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.