Unmanaged Ethernet POE Switches

NSW2010-10T-POE-S-IN

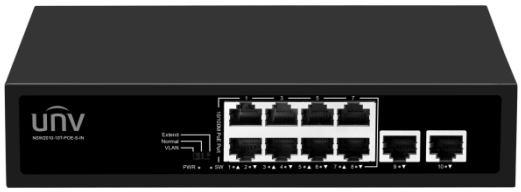

Features

- Comply with IEEE 802.3, IEEE 802.3u, IEEE802.3af/at standards.
- Ethernet port supports 10/100Mbps.
- Flow control mode: full-duplex adopts IEEE 802.3x standard, half-duplex adopts Back pressure standard,
- Support port auto flip (Auto MDI/MDIX),
- Automatically supplied to adaptive devices.
- Panel indicator monitoring status and help failure analysis.
- Support for VLAN mode, Normal mode and Extend mode.

Specifications

Model	NSW2010-10T-POE-S-IN
Hardware Specification	
Ports Type	10×10/100Mbps network ports (RJ45), including 8 PoE ports
Switching capacity	2 Gbps
Forwarding performance	1.49Mpps
Packet Buffer	768K bit
MAC	2K
Max.PoE Power	Max capacity: 96W Max capacity for single port: 30W Mode A: 1/2+, 3/6-
Max.Power	101W
Cooling Fans	0
Weight	0.61 kg

	Packing Qty: 20 units Packing Weight: 18.8KG
Dimensions (W×D×H)	Product : 200 x 118 x 44mm Package : 245*190*60mm
Working Mode	Default(Normal mode) : All ports can communicate with each other., EXTEND(Surveillance mode): Transmission distance up to 250 meters., VLAN(Secure mode): Downlink ports can communicate only with uplink ports.

Dimensions

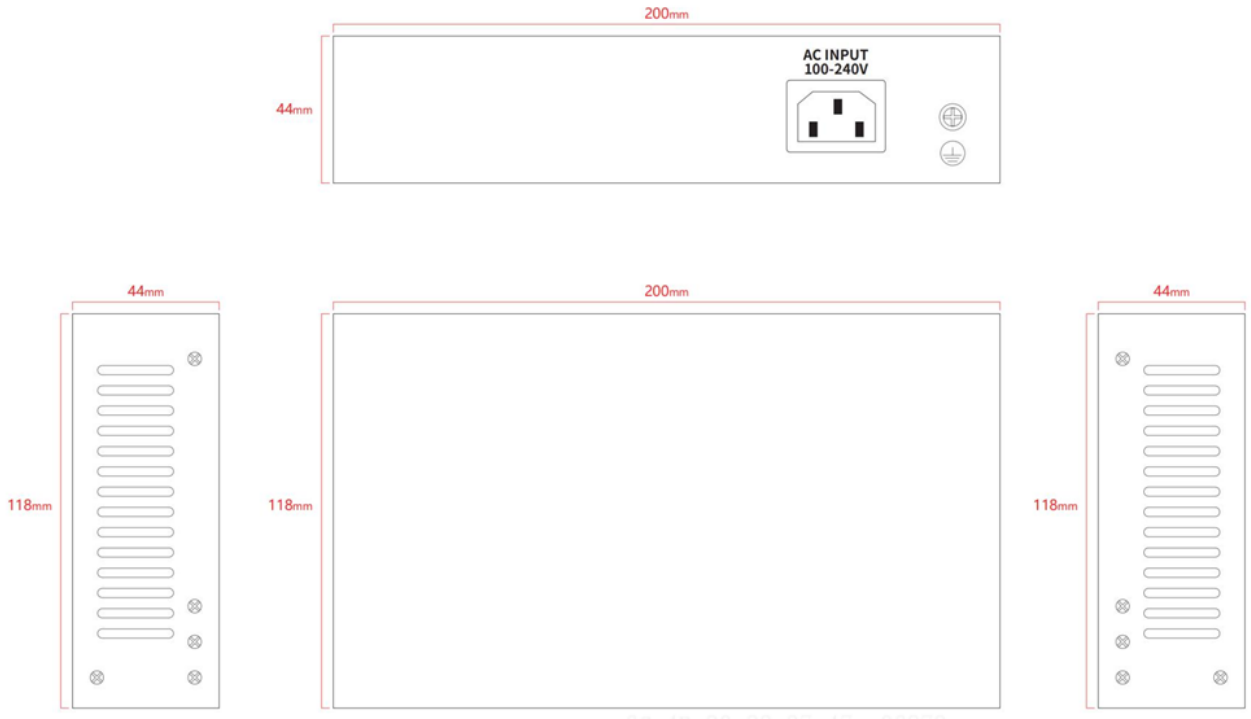

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2024-2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.