

## 8MP HD Intelligent IR Fixed Dome Network Camera IPC328SB-ADF28(40)K-I0



## Features

- High quality image with 8 MP, 1/2.7" CMOS sensor
- 8 MP (3840 × 2160)@20 fps; 5 MP (3072 × 1728)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG
- Intelligent perimeter protection, including cross line, intrusion, enter area, leave area detection
- Intelligent intrusion prevention system based on target classification significantly reduces false alarms caused by leaves, birds, and lights, accurately focusing on humans, vehicles, and non-motor vehicles
- Intelligent face detection
- Intelligent people flow counting and crowd density monitoring
- 120 dB true WDR technology enables clear image in strong light scene
- Supports 9:16 corridor mode
- Alarm I/O: 1/1, audio I/O: 1/1
- Built-in mic
- Smart IR, up to 30 m (98.4 ft) IR distance
- MicroSD, up to 512 GB
- IK10 vandal resistant and IP67 protection


## Specifications

| Model                      | IPC328SB-ADF28K-I0                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | IPC328SB-ADF40K-I0  |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Camera                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| Sensor                     | 1/2.7" CMOS                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| Min. Illumination          | Color: 0.003 Lux (F1.6, AGC ON), 0 Lux with light                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |
| Day/Night                  | IR-cut filter with auto switch (ICR)                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| Shutter                    | Auto/Manual, 1 ~ 1/100000s                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |
| Adjustment Angle           | Pan: 3° to 360°, Tilt: 0° to 68°, Rotate: 3° to 360°                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| WDR                        | 120 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| S/N                        | >52 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| Lens                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| Focal Length               | 2.8 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 4.0 mm              |
| Iris                       | F1.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                     |
| Field of View (H)          | 112.4°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 86.5°               |
| Field of View (V)          | 60.1°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 44.1°               |
| Field of View (D)          | 146.1°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 112.5°              |
| Lens Type                  | Fixed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |
| DORI                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| DORI Distance (Lens)       | 2.8 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 4 mm                |
| DORI Distance (Detect)     | 84.0 m (275.6 ft.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 120.0 m (393.7 ft.) |
| DORI Distance (Observe)    | 33.6 m (110.2 ft.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 48.0 m (157.5 ft.)  |
| DORI Distance (Recognize)  | 16.8 m (55.1 ft.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 24.0 m (78.7 ft.)   |
| DORI Distance (Identify)   | 8.4 m (27.6 ft.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 12.0 m (39.4 ft.)   |
| Illuminator                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| Illumination Distance (IR) | 30 m (98.4 ft.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| Light On/Off Control       | Auto/Manual                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                     |
| Wavelength                 | 850 nm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |
| Supplemental Light         | IR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |
| Video                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |
| Video Compression          | Ultra 265, H.265, H.264, MJPEG                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                     |
| H.264 Code Profile         | Baseline profile, Main profile, High profile                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| Frame Rate                 | Main Stream: 8 MP (3840 × 2160), max. 20 fps; 5 MP (3072 × 1728), max. 30 fps; 4 MP (2560 × 1440), max. 30 fps; 1080P (1920 × 1080), max. 30 fps;<br>Sub Stream: 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps;<br>Third Stream: D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps; |                     |
| Video Bit Rate             | 128 Kbps to 16 Mbps                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |
| U-code                     | Support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |
| OSD                        | Up to 8 OSDs                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |
| Privacy Mask               | Up to 4 areas                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |
| ROI                        | Support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |

|                            |                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Stream               | Triple streams                                                                                                                                                                                             |
| <b>Image</b>               |                                                                                                                                                                                                            |
| White Balance              | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2                                                                                                                                                       |
| Smart IR                   | Support                                                                                                                                                                                                    |
| Digital Noise Reduction    | 2D/3D DNR                                                                                                                                                                                                  |
| Flip                       | Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise                                                                                                                            |
| Dewarping                  | Support                                                                                                                                                                                                    |
| HLC                        | Support                                                                                                                                                                                                    |
| BLC                        | Support                                                                                                                                                                                                    |
| Defog                      | Digital defog                                                                                                                                                                                              |
| <b>Intelligent</b>         |                                                                                                                                                                                                            |
| Smart Intrusion Prevention | Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle)                       |
| Statistical Analysis       | N/A                                                                                                                                                                                                        |
| People Counting            | Support people flow counting and crowd density monitoring                                                                                                                                                  |
| <b>Events</b>              |                                                                                                                                                                                                            |
| Basic Detection            | Motion detection, Ultra motion detection, Tampering alarm, Audio detection                                                                                                                                 |
| General Function           | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication                                                                              |
| <b>Audio</b>               |                                                                                                                                                                                                            |
| Audio Compression          | G.711U, G.711A                                                                                                                                                                                             |
| Audio Bitrate              | 64 Kbps                                                                                                                                                                                                    |
| Two-way Audio              | Support                                                                                                                                                                                                    |
| Suppression                | Support                                                                                                                                                                                                    |
| Sampling Rate              | 8 kHz                                                                                                                                                                                                      |
| <b>Storage</b>             |                                                                                                                                                                                                            |
| Edge Storage               | MicroSD, up to 512 GB                                                                                                                                                                                      |
| Network Storage            | ANR, NAS (NFS)                                                                                                                                                                                             |
| <b>Network</b>             |                                                                                                                                                                                                            |
| Protocols                  | IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, 802.1x, SNMP, PPPoE                                                             |
| Compatible Integration     | ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK                                                                                                                                               |
| User/Host                  | Up to 32 users. 3 user levels: administrator, common user and operator                                                                                                                                     |
| Security                   | Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF |
| Client                     | EZStation, APP                                                                                                                                                                                             |
| Web Browser                | Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+                                                                           |
| <b>Interface</b>           |                                                                                                                                                                                                            |
| Audio I/O                  | 1 Input: impedance 35 kΩ, amplitude 2 V [p-p], 1 Output: impedance 600 Ω, amplitude 2 V [p-p]                                                                                                              |
| Alarm I/O                  | 1/1                                                                                                                                                                                                        |
| Serial Port                | N/A                                                                                                                                                                                                        |

|                     |                                                                                                                                                                                                                                                                     |       |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| Built-in Mic        | Support                                                                                                                                                                                                                                                             |       |
| Built-in Speaker    | N/A                                                                                                                                                                                                                                                                 |       |
| WIFI                | N/A                                                                                                                                                                                                                                                                 |       |
| Network             | 1 × RJ45 10 M/100 M Base-TX Ethernet                                                                                                                                                                                                                                |       |
| Video Output        | N/A                                                                                                                                                                                                                                                                 |       |
| Certification       |                                                                                                                                                                                                                                                                     |       |
| EMC                 | CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035)<br>FCC (FCC 47 CFR part15 B)                                                                                                                                                                            |       |
| Safety              | CE LVD (EN 62368-1)<br>CB (IEC 62368-1)<br>UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)                                                                                                                                                                           |       |
| Environment         | CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);                                                                                                                                                                                                               |       |
| Protection          | IP67 (IEC 60529)<br>IK10 (IEC 62262)                                                                                                                                                                                                                                |       |
| General             |                                                                                                                                                                                                                                                                     |       |
| Power               | DC 12 V±25%, PoE (IEEE 802.3af)                                                                                                                                                                                                                                     |       |
| Power Consumption   | Max. 6.0 W                                                                                                                                                                                                                                                          |       |
| Power Interface     | Ø5.5 mm coaxial power plug                                                                                                                                                                                                                                          |       |
| Dimensions          | Ø109 mm × 83 mm (Ø4.3" × 3.3") (Ø × H)                                                                                                                                                                                                                              |       |
| Weight              | 0.43 kg (0.99 lb.)                                                                                                                                                                                                                                                  |       |
| Material            | Metal                                                                                                                                                                                                                                                               | Metal |
| Working Environment | -30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)                                                                                                                                                                                             |       |
| Storage Environment | -30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)                                                                                                                                                                                             |       |
| Surge Protection    | 4 KV                                                                                                                                                                                                                                                                |       |
| Reset Button        | N/A                                                                                                                                                                                                                                                                 |       |
| Web Client Language | 20 Languages: Traditional Chinese, English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese (Europe), Portuguese (Brazil), Japanese, Thai, Turkish, Spanish (Latin America), Spanish (Europe), Hungarian, Italian, Vietnamese |       |

## Dimensions

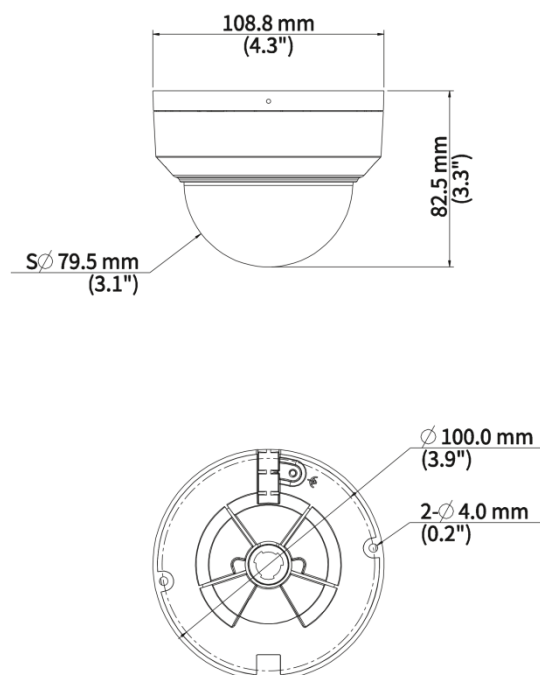

## Accessories

### TR-JB03-G-IN

Junction Box for Mini Fix-dome(Support wiring from behind)



### TR-UM06-E-IN

Slant Mounting Bracket for Fixed Dome



### TR-A01-IN

NPT 3/4" Waterproof Cable Gland



### TR-UP06-IN

Universal Pole Mounting Bracket



### TR-SE24-IN

Dome Pendant Mounting Pole 200mm



### TR-SE24-A-IN

Dome Pendant Mounting Pole 500mm



TR-CM24-IN

Dome Pendant Mounting Bracket(Indoor)



TR-JB07/WM03-G-IN-V2

Wall Mounting Assembling Bracket For 32  
Fix-dome&Mini Fix-dome&Plastic Turret  
Camera



TR-WM03-D-IN-V2

Wall Mounting Bracket for 32  
Fix-dome&Mini Fix-dome&Plastic Turret  
Camera



TR-UC08-C-V2

Bullet&Dome Corner Mounting Bracket



**Zhejiang Uniview Technologies Co., Ltd.**



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China  
(Zhejiang) Pilot Free Trade Zone, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.