

Network Video Recorder

NVR824-R-IM2 Series



Features

- Support Ultra 265/H.265/H.264 video formats
- Support 128/256-channel input
- Support 2-ch HDMI, 1-ch VGA, HDMI at up to 4K (3840x2160) resolution
- Support HDMI1, HDMI2 and VGA independent outputs provided
- Support up to 8 Megapixels resolution recording
- Support redundant power supply optional
- Support HDD hot swap with RAID 0, 1, 5, 6, 10, 50, 60 storage scheme configurable
- Support 2 miniSAS Interfaces
- Support 12V power output
- Support ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- Support N+1 Hot spare

Specifications


Model	NVR824-128-R-IM2-8G		NVR824-256-R-IM2-16G	
Decoding				
Decoding Format	Ultra 265, H.265, H.264			
Decoding Capability	3 x 12MP@30, 5 x 4K@30, 8 x 5MP@30, 15 x 4MP@20, 20 x 3MP@20, 20 x 1080P@30, 24 x 1080P@25, 45 x 720P@30, 54 x 720P@25, 96 x D1			
Decoding Capability Description	The resolution of each channel cannot exceed 4096 pixels in length or width, For VGA/HDMI independent output, the VGA live video is output by default. To output the highest resolution video from the HDMI port, please clear the VGA video on the preview page.			
Audio Compression	G.711A, G.711U			
Network				
Incoming Bandwidth	768 Mbps			
Outgoing Bandwidth	768 Mbps			
Max Remote Users	128			
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS, 802.1x, IPv6, IPv4			
Browser (Plugin)	IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+			
Video/Audio Input				
IP Video Input	128-ch		256-ch	
RCA Audio Input	1-ch			
Peripheral Input				
Ip Speaker	64-ch			
POS	All channels			
Video/Audio Output				
Video Output	Support 2-ch HDMI, 1-ch VGA, HDMI1 and HDMI2 and VGA independent output			
HDMI Output	4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz			
VGA Output	1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz			
RCA Audio Output	1-ch			
Liveview Display	VGA: 1/4/6/8/9/16/25/36; HDMI: 1/4/6/8/9/16/25/36/64			
Default Num of Live Screen	VGA: 1; HDMI: 64			
Corridor Mode Screen	3/4/5/7/9/10/12/16/32			
Playback Screen	1/4/9/16			
Corridor Mode Screen of Playback	1/3			
Two-way Audio				
Two-way Audio	1-ch, RCA (Using the audio input and output)			
Snapshot				
FTP/Schedule/Event Snapshot	Full-ch snapshot (max. 4000 × 3000 video resolution, with snapshot resolution same as the video resolution)			
Recording				

Recording Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF	
Synchronous Playback in Local	16-ch	
Smart Function		
Smart by IPC	All channels (up to 64 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring	
Smart by NVR	Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Video Metadata, (At same channel, only one smart function by NVR can be enabled simultaneously.)	
Smart by NVR Analyzer Mode	Mixed Mode (Face Recognition+Mixed-Traffic Detection), Single Mode (SIP), Only one mode can active at a time on each smart card.Different smart cards can work in different modes.	
VCA Search	Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report	
face detection		
face detection by NVR	All channels with UNV Face Detection Camera Up to 96-ch with normal camera (UNV and Third-part brand, 96-ch 2MP, 48-ch 4MP, 24-ch 4K)	All channels with UNV Face Detection Camera Up to 192-ch with normal camera (UNV and Third-part brand, 192-ch 2MP, 96-ch 4MP, 48-ch 4K)
Search by Image	Support	
SIP		
SIP by NVR with normal cameras	Up to 96-ch with normal camera (UNV and Third-part brand, 96-ch 2MP, 48-ch 4MP, 24-ch 4K)	Up to 192-ch with normal camera (UNV and Third-part brand, 192-ch 2MP, 96-ch 4MP, 48-ch 4K)
Video Metadata		
Video Metadata by NVR with normal cameras	Up to 96-ch with normal camera (UNV and Third-part brand, 96-ch 2MP, 48-ch 4MP, 24-ch 4K)	Up to 192-ch with normal camera (UNV and Third-part brand, 192-ch 2MP, 96-ch 4MP, 48-ch 4K)
Video Metadata Type	Motor Vehicle: Vehicle Color, Vehicle Type, Vehicle Brand, Direction, Non-Motor Vehicle: Non-Motor Vehicle Type, Direction, Gender, Age, Upper Garment Length, Human Body: Gender, Age, Mask, Hairstyle, Bag Style, Direction, Upper Garment Length, Lower Garment Length	
Plate Comparison		
Vehicle Number Library	Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total	
Capacity of Smart Snapshots		
Capacity of Snapshot Records	5 millions records for face snapshot, 5 millions records for Video metadata and SIP and Vehicle snapshot	
Alarm		
General Alarm	Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Audio Detection, Alarm Input	
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal, High CPU Temperature, High Motherboard Temperature, Array Damaged, Array Degraded	
Num of Concurrent Processing Alarms	One every 5 seconds	
GUI Language		

GUI Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
Hard Disk	
SATA	24 SATA Interfaces
Capacity	Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C.)
Disk Group	Support
Redundant Storage	Support
Disk Array Type	RAID 0, 1, 5, 6, 10, 50, 60
Hot Swap	Support
External Interface	
Network Interface	4 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface
USB	Front panel: 2 × USB2.0, Rear panel: 2 × USB3.0
RS485	1
RS232	1
Alarm In	24-ch
Alarm Out	8-ch
eSATA	1
miniSAS	2
Extension Board	4
Power Output	12 V
Power Supply	AC 100 to 240 V
Power Switch	Support
Redundant Power Supply	Support
Working Environment	
Working Temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤350W
Dimensions	
Weight (without HDD)	15KG
Height	4U
Dimensions	482mm × 559mm × 175mm (19.0" × 22.0" × 6.9")
Certification	
Certification	CE; FCC; UL; RoHS; WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035
FCC	Part15 Subpart B
Compliance	
NDAA Compliant	Support
Feature Supported	

Fisheye Dewarping by IPC	Support
Downlink ONVIF	Support (Profile S)
NAS	Support

Dimensions

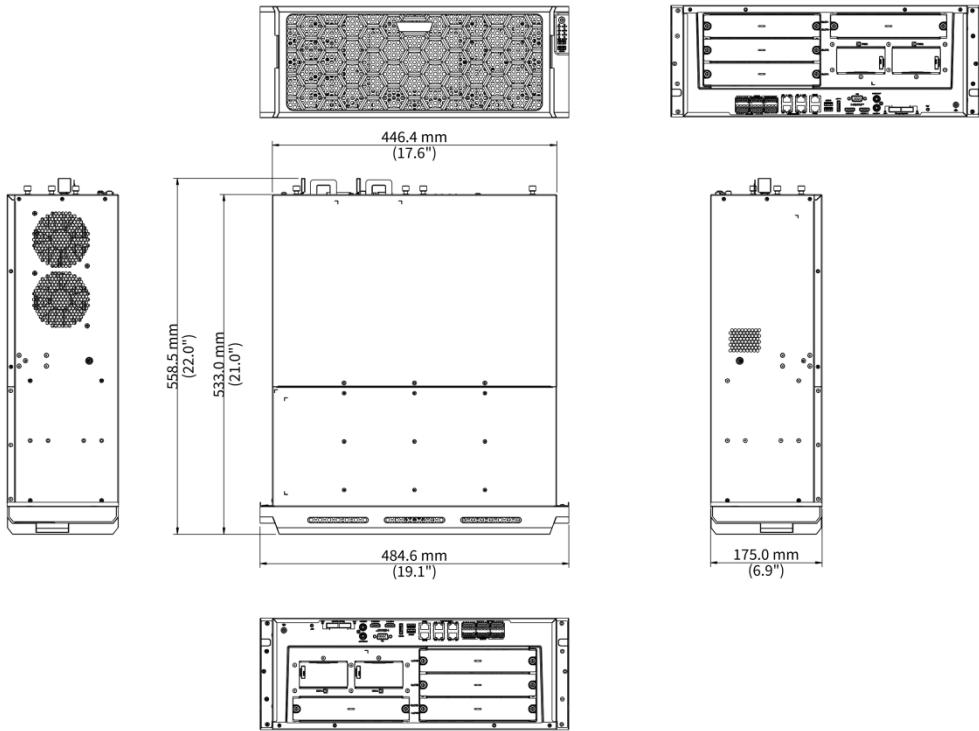

Accessories

FB-HD04-B-NB	FB-HD07-B-NB	DEU1016-B
4-ch HDMI Output Decoding Card	7-ch HDMI Output Decoding Card	16 HDDs 3U Disk Enclosure
		
SL-A	PWR-DC12-550A-IN	
Slide Rail	550W Power Accessories Module	
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.