

【Datasheet】 Positioning and Capture Radar (Single-Lane)

20231228 (Public)

MPR-MU1-OS



Features


- Capture rate of over 99%.
- Supports bidirectional trigger and wrong-way driving capture.
- Supports wireless commissioning and fine-tuning through Wi-Fi network
- Precise positioning within $\pm 0.5\text{m}$ and speed measurement deviation within 0.2km/h .
- Supports front mount and side mount.

Specifications

Model	MPR-MU1-OS
Object detection	
Detection direction	Incoming
Speed accuracy	3km/h
Distance accuracy	$\pm 0.5\text{m}$
Hardware	
Operating temperature	0% to 95% RH
Total weight	$\leq 0.45\text{kg}$
Operating humidity	-35°C to 85°C
Ingress protection	IP66
Operating frequency	24.15GHz
Interface Characteristics	
Power supply	DC 12 V
Communication interface	1 x RS485
Specifications	

Dimensions	168mm*140mm*50mm
Mount method	
Front mount	5 to 10m, it is recommended to install at the road center with the height of 6 meters
Application Scenario	
Application Scenario	Road section

Dimensions

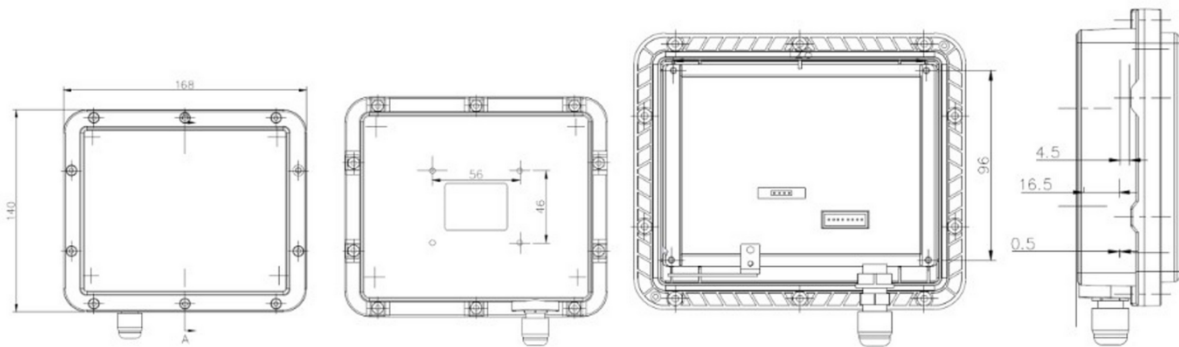

Ordering Info

Product Model	Description
MPR-MU1-OS	Positioning and Capture Radar (Single-Lane)

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

 <http://www.uniview.com>

 overseasbusiness@uniview.com; globalsupport@uniview.com

 No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.