

4-Channel H.265 Decoding Card

FB-HD04-B-NB



Features


- Support 4-ch HDMI
- HDMI at up to 4K (3840x2160) resolution
- All HDMI independent outputs provided
- Support H.265/H.264 video formats
- Up to 16 Megapixels resolution recording

Specifications

| Video/Audio Output | Description |
|--------------------|---|
| HDMI Output | HDMI1 & HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz |

| | |
|---------------------|--|
| | HDMI3 & HDMI4: 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz |
| Decoding | Description |
| Decoding Capability | HDMI1 & HDMI2 & HDMI3 & HDMI4: 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 54 x 960P@30, 64x 720P@30 |
| Decoding | Description |
| Multi-window | 1/4/5/6/7/8/9/16 |
| Working Environment | Description |
| Working Temperature | -10°C ~ + 55°C (14°F to +131°F) |
| Working Humidity | 10% ~ 90% (non-condensing) |
| Weight | Description |
| Weight | <1 Kg (2.2 lb) |

Dimensions

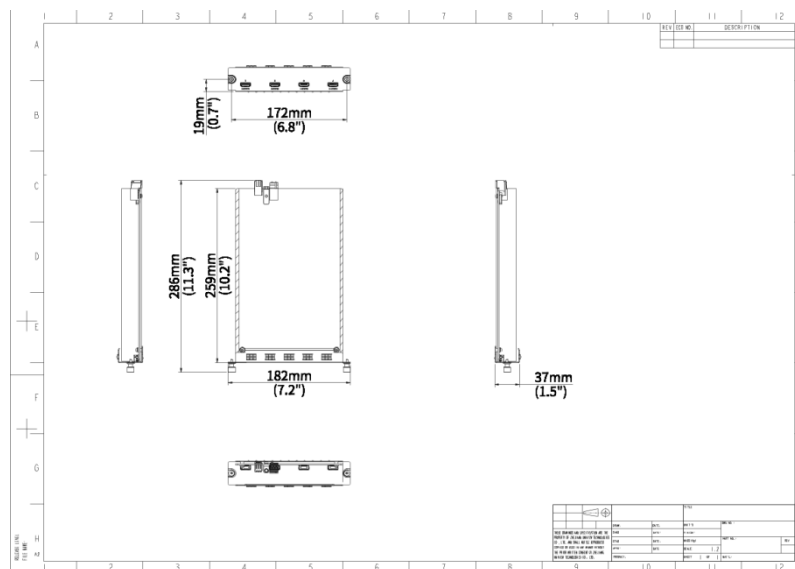

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.