

4-Channel H.265 Decoding Card

FB-HD04-B-NB



Features


- Support 4-ch HDMI
- HDMI at up to 4K (3840x2160) resolution
- All HDMI independent outputs provided
- Support H.265/H.264 video formats
- Up to 16 Megapixels resolution recording

Specifications

Model	FB-HD04-B-NB
Video/Audio Output	

HDMI Output	<p>HDMI1 & HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz</p> <p>HDMI3 & HDMI4: 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz</p>
Decoding	
Decoding Capability	<p>HDMI1 & HDMI2 & HDMI3 & HDMI4: 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 54 x 960P@30, 64x 720P@30</p>
Decoding	
Multi-window	1/4/5/6/7/8/9/16
Working Environment	
Working Temperature	-10°C ~ + 55°C (14°F to +131°F)
Working Humidity	10% ~ 90% (non-condensing)
Weight	
Weight	<1 Kg (2.2 lb)

Dimensions

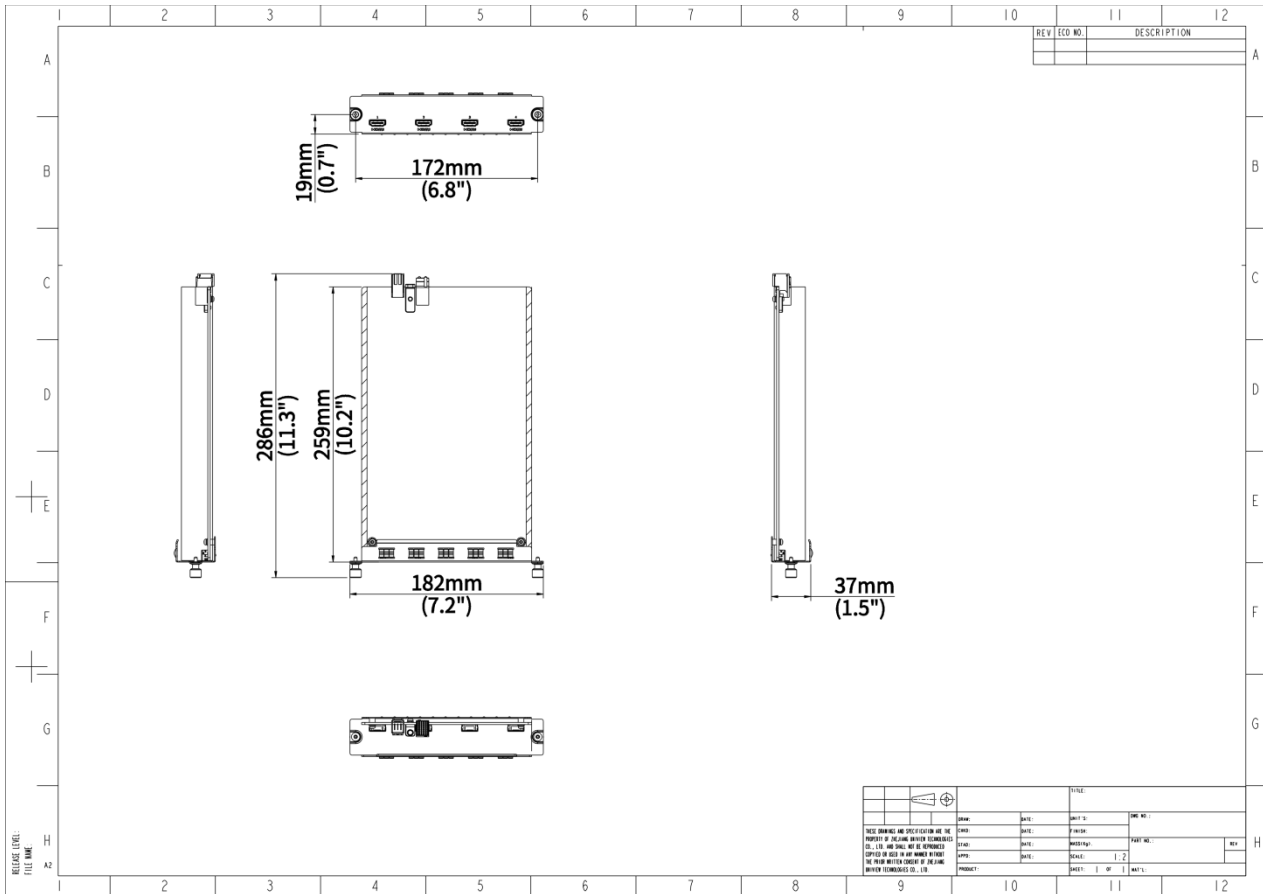

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.