


UTP Category 6 Double Jacket Cables (0.52mm)

CAB-LC3110B-E-IN

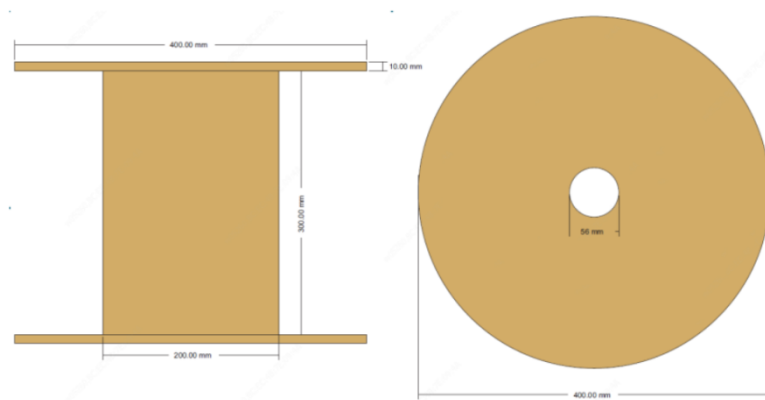

Specifications

Model	CAB-LC3110B-E-IN
Cable	
Product model	CAB-LC3110B-E-IN
Test Standard	ISO/IEC11801、TIA-568-C.2、 YD/T1019
Product specification	HSYV-6 4×2×0.52
Packing length	305±1m
Ambient temperature	-20°C～60°C
Rip-cord	Yes
Crossing backbone	Yes
Conductor	
AWG	24
Nom.O.D.(mm)	0.52±0.03 mm
DC resistance	≤95 Ω/km
Material	Solid-Bare Copper
Insulation	

Diameter	0.93±0.05 mm
Material	HDPE
Thickness	0.2±0.02 mm
Color	Blue/White- Blue,Green/White-Green,Orange/White-Orange,Brown/White-Brown
Pitch	
Offset pitch	≤20 mm
Cable pitch	≤120 mm
Sheath	
Material(IN Jacket)	PVC(complies RoHS/REACH)
Material(OUT Jacket)	LDPE
Thickness	0.55±0.05 mm
External O.D.	6.9±0.3 mm
Tensile strength	>13.5 Mpa
Color	Black
Surface Printing	
Color	White
Letter height	3.0±0.3 mm
Print error / Space	1±0.005 m
Case number	Yes
Packing	
Packing	Wooden shaft

Ordering Info

Product Model	Description
CAB-LC3110B-E-IN	Cat6 305m Outdoor UTP Network Cable (OFC 0.5mm Black)