

Apartment Door Station

OEU-301S-HMKA



Overview

OEU-301S-HMKA apartment door station is one of the terminal equipment of the digital building intercom system, with functions of video intercom, security alarm, video surveillance, etc., providing a safe and comfortable living environment for residents. It can be widely used in apartment building system.

Features

- Delivered with a recess box for recess mount.
- Built-in heating module supports operation at a very low temperature.
- Metal casing.
- Supports batch configuration.
- Supports call and intercom with the connected indoor stations and apps.
- Supports video monitoring, security alarm, and tamper alarm.
- Built-in IC card reader.

Specifications


| Specification index | Description |
|----------------------------------|-------------|
| Card Capacity | 10000 |
| Maximum connected indoor station | 500 |
| Basic business | Description |

| | |
|-------------------------------|---|
| WDR | Support DWDR |
| Protocol | Private protocol |
| Button | 15 buttons with braille Buttons layout: Row 1: 1/2/3 Row 2: 4/5/6 Row 3: 7/8/9 Row 4: */0/# Row 5: Management center/Call/Cancel |
| Hardware Specification | Description |
| FOV | Horizontal: 106.9° Vertical: 56.9° Diagonal: 127.9° |
| Power consumption | PoE: 10.73W DC12V: 8.62W |
| Volume adjustment | Support |
| Audio compression bitrate | 128Kbps |
| Audio output | 1 x Built-in speaker |
| Audio input | 1 x Built-in omnidirectional microphone |
| Audio quality | Noise suppression, echo cancellation, AGC |
| Protection Level | IP65 (Apply waterproof glue to the gap between the device and the wall. See the corresponding quick guide for details) IK08 |
| Weight | 2.10kg |
| Mount method | Wall mount |
| Interface | Power*1, network port*1, RS485*1, IO input*4, IO output*2, door lock*2 (electric lock/door magnet), door opening button*2, door magnet*2, tamper button*1 |
| Network | 100Mbps network port, supports IEEE802.3af PoE power supply |
| Dimensions (L x W x H) | 125mm*358mm*53mm |
| Power Supply | DC12V ±25%, IEEE802.3af PoE power supply |
| Operating environment | -40° C to 60° C, 10% to 90%, noncondensing, outdoor |
| Operating system | Linux |
| Illuminator | IR light (adaptive) |
| Screen size | 3.97 inch |

Ordering Info

| Product Model | Description |
|---------------|--|
| OEU-301S-HMKA | Apartment Door Station(IC Card,15 Keypads) |

Dimensions

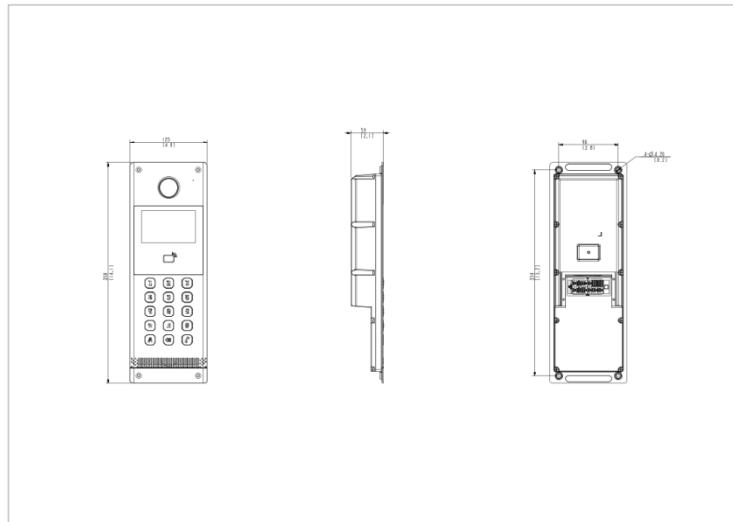

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.