

## Disk Enclosure DEU1016-B




## Features

- High density. The innovative enclosure with 477mm depth and 3U height that holds up to 16 disks, is space-saving and applicable to the standard rack-mounted scenarios.
- Power protection. Disk powered on sequentially during system startup, protection from impulse current.


## Specifications

Model	DEU1016-B
Hard Disk	
SATA	16 SATA Interfaces
Capacity	Up to 24TB for each disk
External Interface	
miniSAS	1
RS232	1
Power Supply	AC 100~240V
Working Environment	
Working Temperature	-10 °C ~ + 55 °C (+14 °F ~ +131 °F)
Working Humidity	5%~95% RH (non-condensing)
Power Consumption (With HDD)	< 160W(With 16 HDDs)
Dimensions	
Weight (Without HDD)	< 10Kg (22lb)
Dimensions	482mm × 477mm× 131mm (19.0"×18.8"×5.1")
Height	3U

# Dimensions

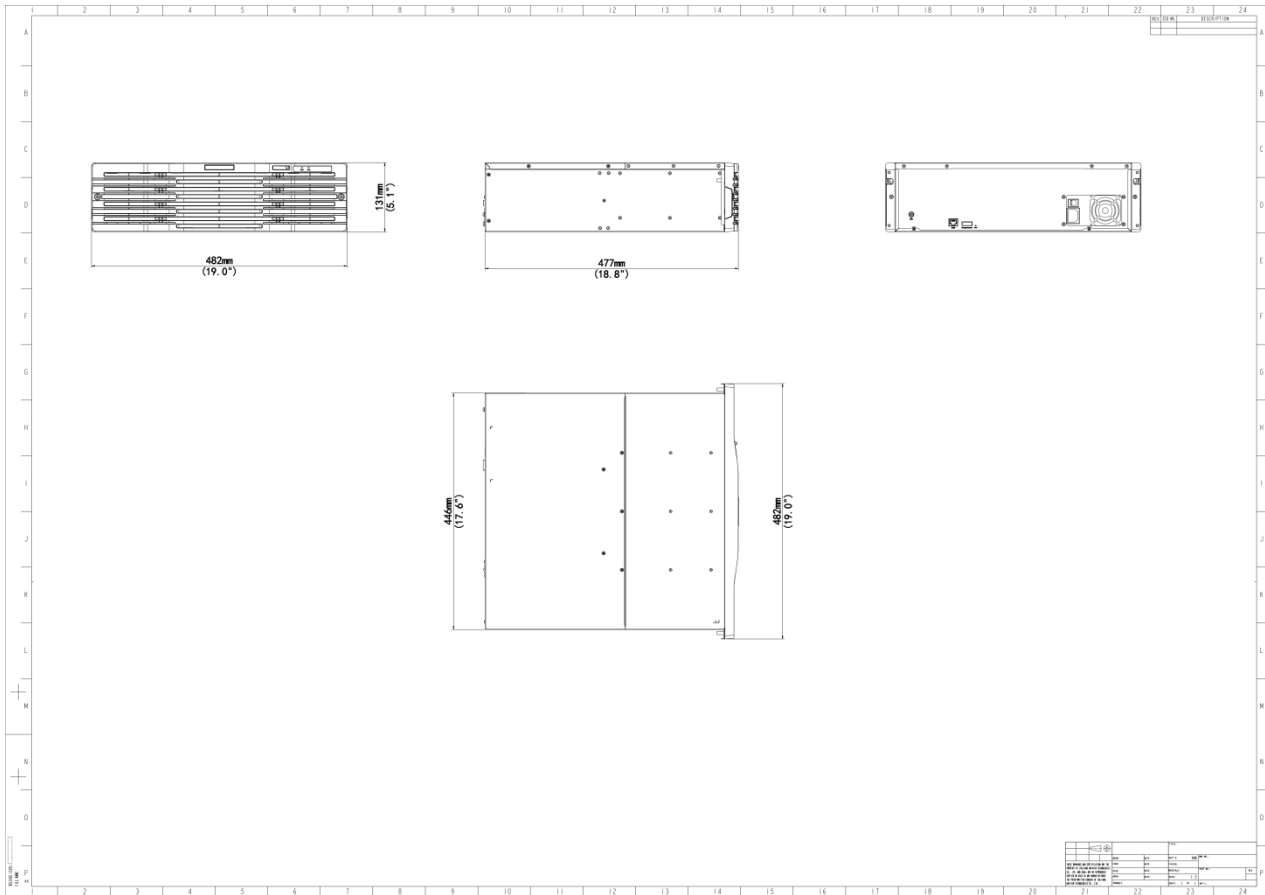

# Rear Panel

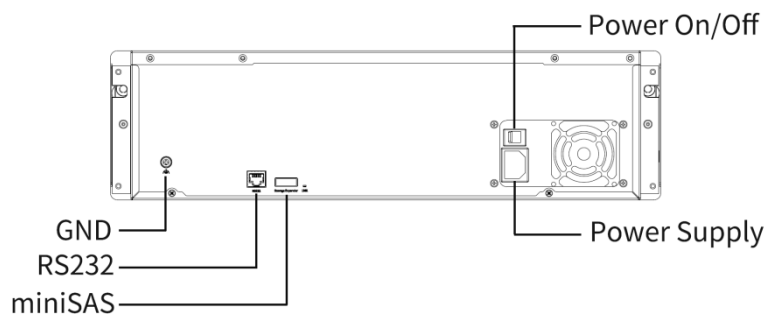

# Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。