
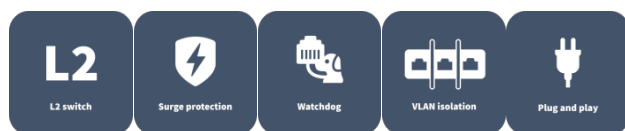


# Industrial PoE Switch

## IS2000-4GT2GP-POE-IN@PWR75



## Features


- Support IEEE 802.3af/at standard. Port 1 supports HiPoE with a maximum of 60W.
- Working temperature -40~75°C, surge protection 6KV, ESD: Air 8KV, Contact 6KV
- 4PIN industrial terminal+ DC2.1 input interface, DC48-55V wide voltage input
- Support VLAN, Genius, Extend modes
- Support rail and wall mount installation

## Specifications

| Model                  | IS2000-4GT2GP-POE-IN@PWR75                                                                                                             |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Hardware Specification |                                                                                                                                        |
| Standards              | IEEE802.3, IEEE802.3i, IEEE802.3u, IEEE802.3ab, IEEE802.3z                                                                             |
| Ports Type             | 4*10/1000Mbps RJ45 PoE Ports<br>2*1000Mbps SFP Slots                                                                                   |
| Switching capacity     | 12Gbps                                                                                                                                 |
| Jumbo Frame            | 10KBytes                                                                                                                               |
| Forwarding performance | 8.92Mpps                                                                                                                               |
| Max.PoE Power          | Max capacity: 65W<br>Port1: Max capacity for single port: 60W<br>Port2-4: Max capacity for single port: 30W<br>Mode A 1/2 (-), 3/6 (+) |
| Max.Power              | 75W                                                                                                                                    |
| MAC                    | 8K                                                                                                                                     |

|                        |                                                                                                                                                                                                                                                                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Transfer Mode          | Store-and-forward                                                                                                                                                                                                                                                                                                                                   |
| Dimensions (W×D×H)     | 120*87*34mm                                                                                                                                                                                                                                                                                                                                         |
| Operating Temperature  | -40°C to 75 °C                                                                                                                                                                                                                                                                                                                                      |
| Operating Humidity     | 10% ~ 95% non-condensing                                                                                                                                                                                                                                                                                                                            |
| Storage Humidity       | 5% ~ 95% non-condensing                                                                                                                                                                                                                                                                                                                             |
| Indicator              | <p>PWR (Red)</p> <p>Off: Powered off</p> <p>On: Powered on</p> <p>Ports 1-4 /1-8(Green)</p> <p>Slow Flashing: 10/100/1000Mbps Link normal</p> <p>Off: Link blocked</p> <p>Fast Flashing: Data transmitting</p> <p>Ports G5-G6 /G9-G10(Green)</p> <p>On: 10/100/1000Mbps Link normal</p> <p>Off: Link blocked</p> <p>Flashing: Data transmitting</p> |
| Electrostatic Standard | Air 8KV, Contact 6KV (Class B)                                                                                                                                                                                                                                                                                                                      |
| Surge Protection       | Common mode 6KV, Differential mode 2KV (Class B)                                                                                                                                                                                                                                                                                                    |
| Power Supply           | DC:48-57V, powered by adapter (NVR-75-48, input voltage : 100-240V AC , output voltage : 48V DC, 1.6A , 32*125.2*113.5mm, DIN35 rail installation )                                                                                                                                                                                                 |
| Working Mode           | V: VLAN mode, ports 1-4 are isolated from each other, communicating with ports 5-6, E: Extend mode, when the PoE port is in Extend mode, ports 1-4 force 10Mbps to extend the transmission distance to 250meters, G: PoE watchdog on                                                                                                                |
| Button                 | Dual color LED selection: default green (link data), switch yellow LED(PoE)                                                                                                                                                                                                                                                                         |

# Dimensions

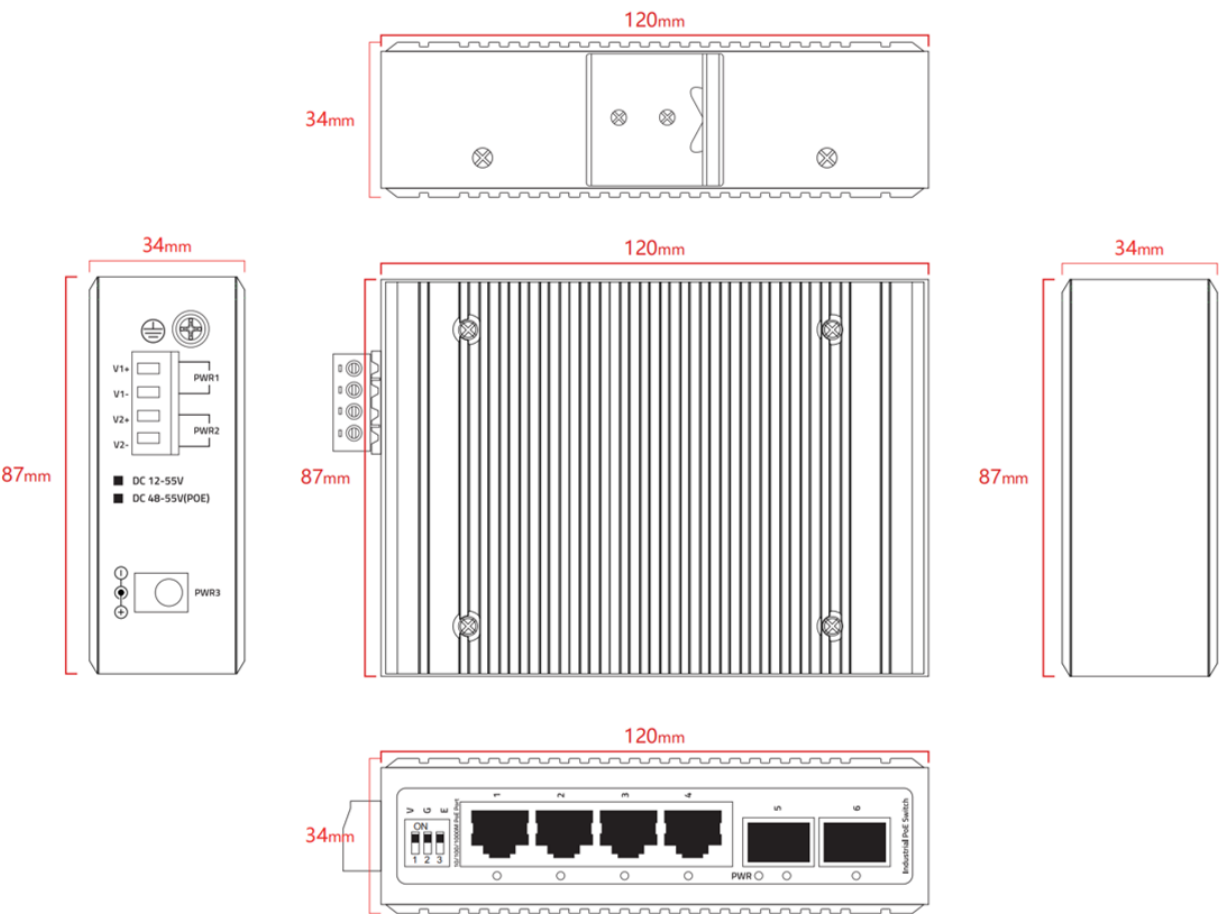

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.