# UNV

# **OEU-201B-HMK-W Villa Outdoor Station**

### OEU-201B-HMK-W



### Overview

OEU-201B-HMK-W is one of the terminal equipment of the digital building intercom system, with video intercom, security alarm, video surveillance, to provide a safe and comfortable living environment for residents. It can be used in villa residential building system.

## Features

- Front panel: Plastic cement
- Supports batch configuration
- Supports intercom calls to associated indoor units or APPs
- Support monitoring function, security alarm, tamper alarm
- Support Wi-Fi
- Built-in IC card reader

## Specifications

| Model                  | OEU-201B-HMK-W                             |  |
|------------------------|--|--|
| Hardware Specification |  |  |
| Power Supply           | DC 12V±25% input;IEEE802.3af, Standard PoE |  |
| Operation System       | Linux                                      |  |

# UNV

# DATASHEET

| Supplement Light               | IR light(Adaptive infrared compensation)  |
|--------------------------------|---|
| FOV                            | Horizontal:124.3°   |
|                                | Vertical:67.5°  |
|                                | Diagonal:147.2°   |
| Power Consumption              | <10W  |
| Volume Adjustment              | Adjustable  |
| Audio Quality                  | Noise suppression, echo cancellation and AGC  |
| Audio Input                    | 1 built-in omnidirectional microphone   |
| Audio Output                   | 1 built-in speaker  |
| Audio Compression Standard     | PCM, G711, MP3  |
| Audio Compression Bitrate      | 128Kbps   |
| Protection Level               | IP65 (Apply waterproof glue to the gap between the device and the wall. For more information, see |
|                                | the quick guide.)   |
| Weight                         | 0.261Kg   |
| Dimensions (L x W x H)         | 78mm×170mm×34mm   |
| Mount Method                   | Wall mounted, flush installation  |
| Interface                      | Power *1, network port *1, WIFI, RS485, door lock interface *2, IO input *4                       |
| Network                        | 100Mbps network port, supports IEEE802.3af PoE power supply                                       |
| Operating Environment          | -30°C~+60°C,10%~90%, non-condensing, outdoor  |
| Specification Index            |   |
| Card Capacity                  | 2000  |
| Linked Indoor Station Capacity | 20  |
| Basic Business                 |   |
| WDR                            | Support DWDR  |
| Protocol                       | UNV private protocol  |
| Button                         | 1 physical button   |

# Ordering Info

| Product Model  | Description                      |
|----------------|----------------------------------|
| OEU-201B-HMK-W | Villa Door Station(IC Card,WiFi) |



#### Accessories

EP-CS201

EP-CS201-F


201 Embedded Waterproof Cover

201 Wall Mounted Waterproof Cover





## Dimensions

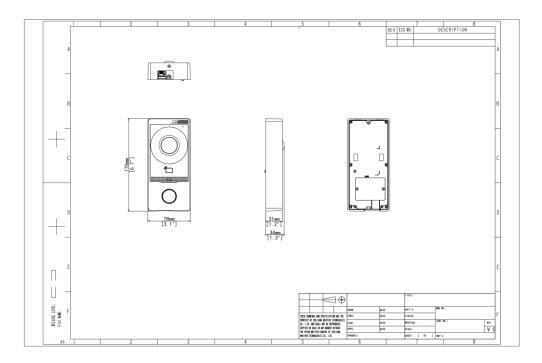

#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

# unv

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.