

【Datasheet】 UNV LAMP-IH25@M3-F-OS Infrared Strobe Light Infrared flash Light(Overseas)

LAMP-IH25@M3-F-OS



Features


- 24 high power IR light LEDs.
- Flash brightness 8 level adjustable.
- Support infrared White explosion switch.
- Life up to more than 10 million times.
- Brightness does not vary with supply voltage fluctuations.
- IP65 protection level, waterproof and dustproof.

Specifications

Model	LAMP-IH25@M3-F-OS
LED strobe	
Power consumption	Default power is 4.4W($\leq 40W$)
Light type	Infrared flash & white flash & infrared strobe
Luminous angle	10°
Trigger frequency	100Hz
Optimal fill light distance	15~30m
Trigger mode	Level trigger, switch trigger
Beam angle	0-40%
LED lamp bead wavelength	850nm
White light flash	
White light flash lifetime	More than 10 million times
Output energy	$\leq 100J$
Flash brightness	8-level adjustable

Color temperature	≤7000K
Return time	≤50ms
Duration of flash	1/10000s~1/1000s
White light flash trigger mode	Level trigger
Gas explosion level	1~8 level adjustable
Fill light distance	15~30 m
Red and White Switch	Switch by frequency
Filter form	Window shades
Be in common use	
Dimensions (L × W × H)	452*279*279mm
Weight	6.8kg
Ingress protection	IP65
Bracket rotation angle	-45° to 45°
Power supply	110 ~ 220Vac
Length of tail line	4.5m
Communication interface	RS485
Operating environment	-40°C~70°C, 10~95%RH

Dimensions

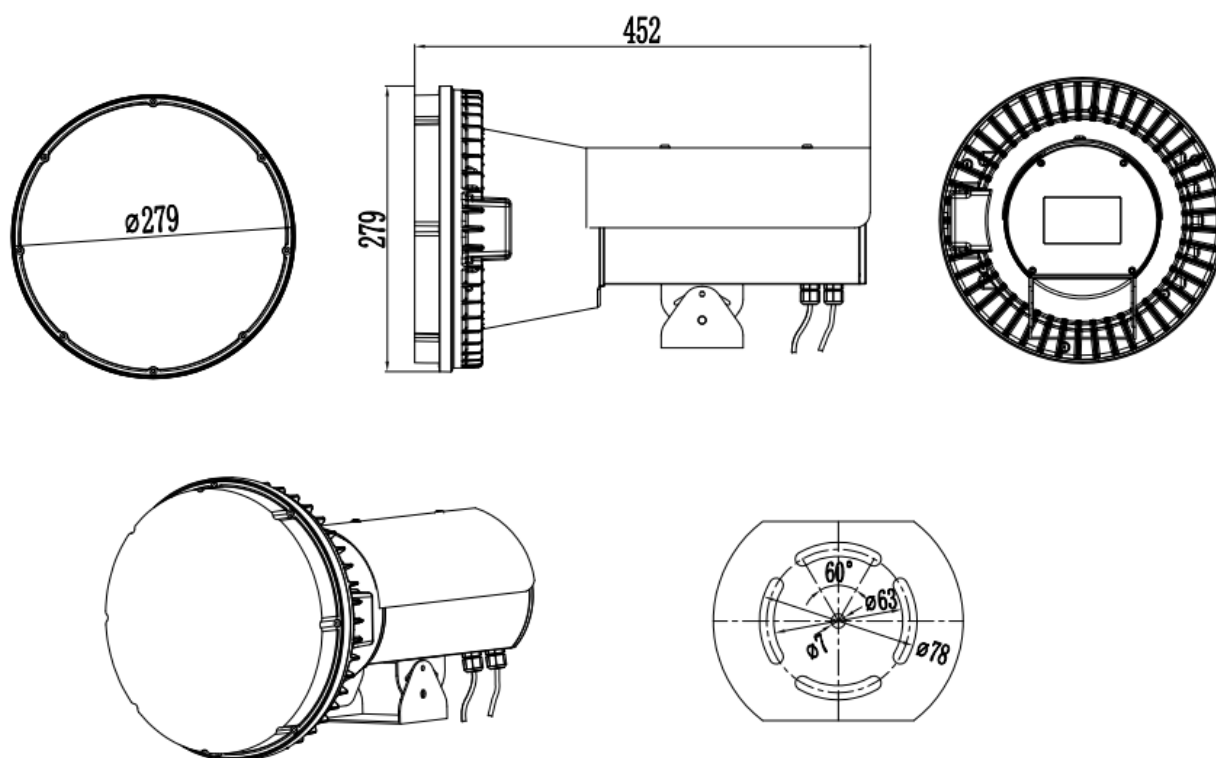

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.