


# 4MP WDR 듀얼 라이트 VF 터렛 네트워크 카메라 IPC3634LE-ADZK-DL3

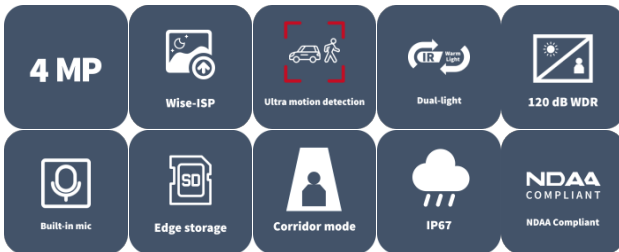

## 주요 특징

- 4 MP, 1/3.0" CMOS 센서의 고품질 이미지
- 4 MP(2688 × 1520)@25/20fps; 4 MP(2560 × 1440)@25/20fps; 3 MP(2304 × 1296)@30/25fps; 1080P(1920 × 1080)@30/25fps
- Ultra 265, H.265, H.264, MJPEG(서브스트림만 해당)
- 크로스 라인, 침입 감지를 포함한 스마트 침입 방지(인체 감지 기반)
- 울트라 모션 감지 지원(사람/차량 감지)
- 120dB 트루 WDR 기술로 강한 조명이 있는 장면에서도 선명한 이미지 구현
- 내장 마이크
- 9:16 복도 모드 지원
- 스마트 IR, 최대 50m(164.0피트) IR 거리

- 줌 라이트, 최대 50m(164.0피트) 줌 라이트 거리
- IP67 보호
- MicroSD, 최대 512GB

## 사양

Model	IPC3634LE-ADZK-DL3
<b>카메라</b>	
최대 해상도	4 MP
센서	1/3.0" CMOS
최저 조도	Color: 0.002 Lux (F1.6, AGC ON), 0 Lux with IR on
주간/야간	IR-cut filter with auto switch (ICR)
셔터	Auto/Manual, 1 to 1/100000 s
조정 각도	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°
S/N	> 52 dB
WDR	120 dB
<b>렌즈</b>	
초점 거리	2.8 to 12 mm
Iris	F1.6
화각(수평)	95.6° to 30.9°
화각(수직)	52.0° to 17.6°
화각(사각)	112.2° to 33.7°
렌즈 타입	Motorized
Iris Type	Fixed
<b>DORI</b>	
DORI 거리(렌즈)	2.8 to 12 mm


DORI 거리(감지)	42.0 m to 180.0 m (137.8 ft. to 590.6 ft.)
DORI 거리(관찰)	21.0 m to 90.0 m (68.9 ft. to 295.3 ft.)
DORI 거리(인식)	10.1 m to 43.2 m (33.1 ft. to 141.7 ft.)
DORI 거리(식별)	6.3 m to 27.0 m (20.7 ft. to 88.6 ft.)
<b>조명</b>	
조명 거리(웜라이트)	50 m (164.0 ft.)
조명 거리(IR)	50 m (164.0 ft.)
조명 켜기/끄기 제어	Auto/Manual
파장	850 nm
<b>비디오</b>	
비디오 압축	Ultra 265, H.265, H.264, MJPEG (Sub Stream Only)
H.264 코드 프로파일	Baseline profile, Main profile, High profile
프레임 속도	Main Stream: 4 MP (2688 × 1520), max. 25 fps; 4 MP (2560 × 1440), max. 25 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps; Sub Stream: 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps;
비디오 비트 전송률	128 Kbps to 6144 Kbps
U-code	Support
OSD	Up to 4 OSDs
프라이버시 마스크	Up to 4 areas
ROI	Support
비디오 스트림	Dual streams
<b>이미지</b>	
화이트 밸런스	Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2, Area white balance
디지털 노이즈 제거	2D/3D DNR

스마트 IR	Support
이미지 회전	Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise
디워핑	N/A
HLC	Support
BLC	Support
디포그	Digital defog
<b>이벤트</b>	
기본 감지	Motion detection, Ultra motion detection (human/ vehicle detection) , Tampering alarm, Audio detection, Cross line (based on human body detection), Intrusion (based on human body detection)
기본 기능	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication
<b>오디오</b>	
오디오 압축	G.711U, G.711A, AAC-LC
오디오 비트레이트	G.711U/G.711A: 64 kbps, AAC-LC: 128 kbps
양방향 오디오	N/A
억제	Support
샘플링 레이트	G.711U/G.711A: 8 kHz, AAC-LC: 8 kHz, 16 kHz, 48 kHz
<b>저장 장치</b>	
엣지 스토리지	MicroSD, up to 512 GB
네트워크 스토리지	ANR, NAS (NFS)
<b>네트워크</b>	
프로토콜	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, HTTPS, SMTP, SSL/TLS, QoS, SNMP, PPPoE, UPnP, HTTP, 802.1x
호환 통합	ONVIF (Profile S, Profile G, Profile T), API, SDK
사용자/호스트	Up to 32 users. 3 user levels: administrator, common user and operator

보안	Password protection, Strong Password, HTTPS encryption, Export operation logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF
클라이언트	EZStation, APP
웹 브라우저	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+
<b>인터페이스</b>	
오디오 I/O	N/A
알람 I/O	N/A
시리얼 포트	N/A
내장 마이크	Support
내장 스피커	N/A
WIFI	N/A
네트워크	1 × RJ45 10 M/100 M Base-TX Ethernet
비디오 출력	N/A
<b>인증</b>	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130-4) FCC (FCC 47 CFR part15 B)
안전성	CE-LVD (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
환경	CE-RoHS (2011/65/EU ; (EU) 2015/863) ; WEEE (2012/19/EU)
보호	IP67 (IEC 60529)
<b>일반</b>	
전원	DC 12 V±25%, PoE (IEEE 802.3af)
전력 소비량	Max. 5.8 W
전원 인터페이스	Ø5.5 mm coaxial power plug

크기	Ø129 mm × 110 mm (Ø5.1" × 4.3") (Ø × H)
무게	0.67 kg (1.48 lb)
작업 환경	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
저장 환경	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
재료	Metal
서지 보호	4 KV
초기화 버튼	Support
웹 클라이언트 언어	14 Languages: English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese, Spanish, Spanish (Europe), Italian, Turkish

# 크기

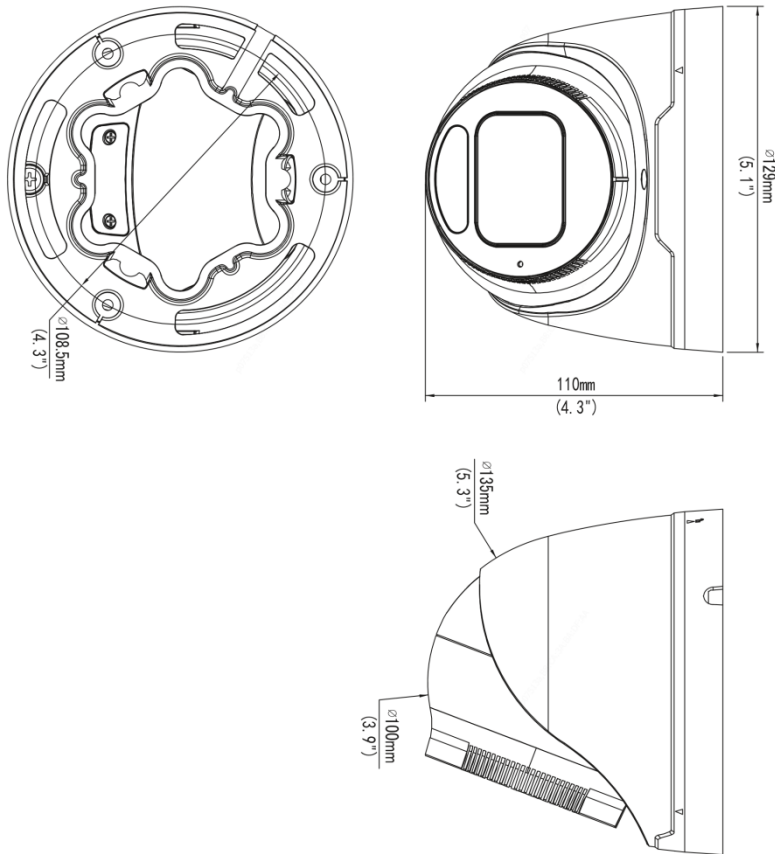

# 액세서리

### TR-JB03-H-IN-V2

Junction Box for Metal Turret Camera(Support wiring from behind)



### TR-JB03-J-IN

Junction Box for Metal Turret Camera(Support wiring from behind)



### TR-JB07/WM03-F-IN-V2

Wall Mounting Assembling Bracket with Back Hole for 3 Inch Hemisphere



TR-WM03-B-IN-V2

Wall Mounting Assembling Bracket for 3  
Inch Hemisphere



TR-A01-IN

NPT 3/4" Waterproof Cable Gland



TR-UP06-C-IN-V2

Pole Mounting Bracket for Bullet Junction  
Box Only



TR-UC08-C-V2

Bullet&Dome Corner Mounting Bracket



TR-CM24-IN

Dome Pendant Mounting Bracket(Indoor)



TR-SE24-A-IN

Dome Pendant Mounting Pole 500mm



TR-SE24-IN

Dome Pendant Mounting Pole 200mm



# Unlimited New View

## 浙江宇视科技有限公司



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。