


## 5MP Fixed IR Dome Network Camera IPC325LB-AF28(40)-A2

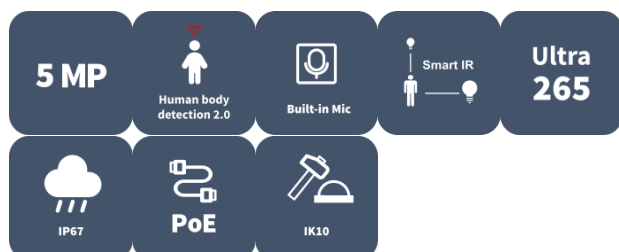

## Features

- High quality image with 5 MP, 1/3.0" CMOS sensor
- 5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps; 3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
- Supports accurate human body detection 2.0
- Ultra 265, H.265, H.264
- Built-in mic
- Smart IR, up to 30 m (98.4 ft.) IR distance
- Day/night functionality
- 2D/3D DNR (digital noise reduction)
- DC 12 V, PoE (IEEE 802.3af) power supply
- IP67 protection
- IK10 vandal resistant
- 2-axis

## Specifications


| Model             | IPC325LB-AF28-A2                                 | IPC325LB-AF40-A2 |
|-------------------|--------------------------------------------------|------------------|
| Camera            |                                                  |                  |
| Max Resolution    | 5 MP                                             |                  |
| Sensor            | 1/3.0" CMOS                                      |                  |
| Min. Illumination | Color: 0.01 Lux (F2.0, AGC ON), 0 Lux with IR on |                  |

|                            |                                                                                                                                                                                                                                                                                  |                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Day/Night                  | IR-cut filter with auto switch (ICR)                                                                                                                                                                                                                                             |                    |
| Shutter                    | Auto/Manual, 1 to 1/100000 s                                                                                                                                                                                                                                                     |                    |
| Adjustment Angle           | Pan: 3° to 360°, Tilt: 0° to 75°                                                                                                                                                                                                                                                 |                    |
| S/N                        | > 52 dB                                                                                                                                                                                                                                                                          |                    |
| WDR                        | DWDR                                                                                                                                                                                                                                                                             |                    |
| Lens                       |                                                                                                                                                                                                                                                                                  |                    |
| Focal Length               | 2.8 mm                                                                                                                                                                                                                                                                           | 4.0 mm             |
| Iris Type                  | Fixed                                                                                                                                                                                                                                                                            |                    |
| Iris                       | F2.0                                                                                                                                                                                                                                                                             |                    |
| Field of View (H)          | 94.3°                                                                                                                                                                                                                                                                            | 73.4°              |
| Field of View (V)          | 52.2°                                                                                                                                                                                                                                                                            | 40.4°              |
| Field of View (D)          | 99.6°                                                                                                                                                                                                                                                                            | 79.5°              |
| Lens Type                  | Fixed                                                                                                                                                                                                                                                                            |                    |
| DORI                       |                                                                                                                                                                                                                                                                                  |                    |
| DORI Distance (Lens)       | 2.8 mm                                                                                                                                                                                                                                                                           | 4 mm               |
| DORI Distance (Detect)     | 63.0 m (206.7 ft.)                                                                                                                                                                                                                                                               | 90.0 m (295.3 ft.) |
| DORI Distance (Observe)    | 25.2 m (82.7 ft.)                                                                                                                                                                                                                                                                | 36.0 m (118.1 ft.) |
| DORI Distance (Recognize)  | 12.6 m (41.3 ft.)                                                                                                                                                                                                                                                                | 18.0 m (59.1 ft.)  |
| DORI Distance (Identify)   | 6.3 m (20.7 ft.)                                                                                                                                                                                                                                                                 | 9.0 m (29.5 ft.)   |
| Illuminator                |                                                                                                                                                                                                                                                                                  |                    |
| Supplemental Light         | IR                                                                                                                                                                                                                                                                               |                    |
| Illumination Distance (IR) | 30 m (98.4 ft.)                                                                                                                                                                                                                                                                  |                    |
| Wavelength                 | 850 nm                                                                                                                                                                                                                                                                           |                    |
| IR On/Off Control          | Auto/Manual                                                                                                                                                                                                                                                                      |                    |
| Video                      |                                                                                                                                                                                                                                                                                  |                    |
| Video Compression          | Ultra 265, H.265, H.264                                                                                                                                                                                                                                                          |                    |
| H.264 Code Profile         | Baseline profile, Main profile, High profile                                                                                                                                                                                                                                     |                    |
| Frame Rate                 | Main Stream: 5 MP (2592 × 1944), max. 20 fps; 4 MP (2560 × 1440), max. 20 fps; 3 MP (2304 × 1296), max. 20 fps; 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps Sub Stream: 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps |                    |
| Video Bit Rate             | 128 Kbps to 6144 Kbps                                                                                                                                                                                                                                                            |                    |
| U-code                     | Support                                                                                                                                                                                                                                                                          |                    |
| OSD                        | Up to 4 OSDs                                                                                                                                                                                                                                                                     |                    |
| Privacy Mask               | Up to 4 areas                                                                                                                                                                                                                                                                    |                    |
| ROI                        | Support                                                                                                                                                                                                                                                                          |                    |
| Video Stream               | Dual streams                                                                                                                                                                                                                                                                     |                    |
| Image                      |                                                                                                                                                                                                                                                                                  |                    |
| White Balance              | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2, Area white balance                                                                                                                                                                                                         |                    |
| Digital Noise Reduction    | 2D/3D DNR                                                                                                                                                                                                                                                                        |                    |
| Smart IR                   | Support                                                                                                                                                                                                                                                                          |                    |
| Flip                       | Normal, Flip vertical, Flip horizontal, 180°                                                                                                                                                                                                                                     |                    |
| Dewarping                  | N/A                                                                                                                                                                                                                                                                              |                    |
| HLC                        | Support                                                                                                                                                                                                                                                                          |                    |

|                        |                                                                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BLC                    | Support                                                                                                                                                                                                    |
| Defog                  | Digital defog                                                                                                                                                                                              |
| Image Stabilization    | N/A                                                                                                                                                                                                        |
| <b>Events</b>          |                                                                                                                                                                                                            |
| Basic Detection        | Human body detection 2.0, Motion detection, Audio detection                                                                                                                                                |
| General Function       | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication                                                                              |
| <b>Audio</b>           |                                                                                                                                                                                                            |
| Audio Compression      | G.711U, G.711A                                                                                                                                                                                             |
| Audio Bitrate          | 64 Kbps                                                                                                                                                                                                    |
| Two-way Audio          | N/A                                                                                                                                                                                                        |
| Suppression            | Support                                                                                                                                                                                                    |
| Sampling Rate          | 8 kHz                                                                                                                                                                                                      |
| <b>Storage</b>         |                                                                                                                                                                                                            |
| Edge Storage           | N/A                                                                                                                                                                                                        |
| <b>Network</b>         |                                                                                                                                                                                                            |
| Protocols              | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, UPnP, HTTP, HTTPS, QoS, SSL/TLS                                                                                              |
| Compatible Integration | ONVIF (Profile S, Profile T) , API, SDK                                                                                                                                                                    |
| User/Host              | Up to 32 users. 3 user levels: administrator, common user and operator                                                                                                                                     |
| Security               | Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF |
| Client                 | UNV-Link, UNV-Link Pro, EZStation                                                                                                                                                                          |
| Web Browser            | Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+, Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+                                                                           |
| <b>Interface</b>       |                                                                                                                                                                                                            |
| Audio I/O              | N/A                                                                                                                                                                                                        |
| Alarm I/O              | N/A                                                                                                                                                                                                        |
| Serial Port            | N/A                                                                                                                                                                                                        |
| Built-in Mic           | Support                                                                                                                                                                                                    |
| Built-in Speaker       | N/A                                                                                                                                                                                                        |
| WIFI                   | N/A                                                                                                                                                                                                        |
| Network                | 1 × RJ45 10 M/100 M Base-TX Ethernet                                                                                                                                                                       |
| Video Output           | N/A                                                                                                                                                                                                        |
| <b>Certification</b>   |                                                                                                                                                                                                            |
| EMC                    | CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035)FCC (FCC 47 CFR part15 B)                                                                                                                       |
| Safety                 | CE LVD (EN 62368-1)UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)                                                                                                                                          |
| Environment            | CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);                                                                                                                                                      |
| Protection             | IP67 (IEC 60529)IK10 (IEC 62262)                                                                                                                                                                           |
| <b>General</b>         |                                                                                                                                                                                                            |
| Power                  | DC 12 V±25%, PoE (IEEE 802.3af)                                                                                                                                                                            |
| Power Consumption      | Max. 3.9 W                                                                                                                                                                                                 |

|                     |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Power Interface     | Ø5.5 mm coaxial power plug                                              |
| Dimensions          | Ø111 mm × 82.5 mm (Ø4.4" × 3.2") (Ø × H)                                |
| Weight              | 0.35 kg (0.77 lb.)                                                      |
| Material            | Metal + Plastic                                                         |
| Working Environment | -30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing) |
| Storage Environment | -30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing) |
| Surge Protection    | 4 KV                                                                    |
| Reset Button        | N/A                                                                     |
| Web Client Language | 4 Languages: English, Russian, Spanish, Vietnamese                      |

## Dimensions

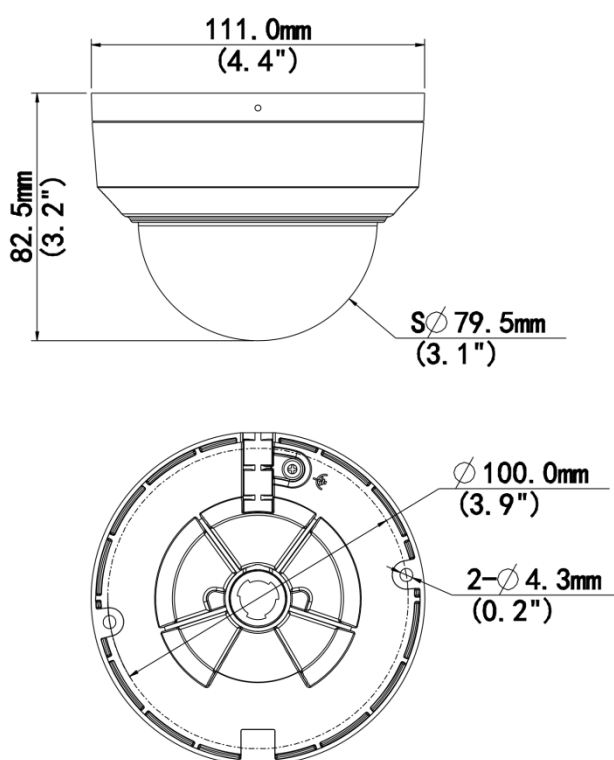

## Accessories

### TR-JB03-G-IN

Junction Box for Mini Fix-dome(Support wiring from behind)



### TR-JB07/WM03-G-IN

Wall Mounting Assembling Bracket For 32 Fix-dome&Mini Fix-dome&Plastic Turret Camera



### TR-WM03-D-IN

Wall Mounting Bracket for 32 Fix-dome&Mini Fix-dome&Plastic Turret Camera



TR-UM06-E-IN

Slant Mounting Bracket for Fixed Dome



TR-A01-IN

NPT 3/4" Waterproof Cable Gland



TR-UP06-IN

Universal Pole Mounting Bracket



TR-UC08-C

Bullet&Dome Corner Mounting Bracket



TR-SE24-IN

Dome Pendent Mounting Pole 200mm



TR-SE24-A-IN

Dome Pendent Mounting Pole 500mm



TR-CM24-IN

Dome Pendent Mounting Bracket(Indoor)



**Zhejiang Uniview Technologies Co., Ltd.**



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China  
(Zhejiang) Pilot Free Trade Zone, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.