


F/FTP Category 6A Cables

UV-F/FTP6A-300-BC23AWG-DCA-R-O

Section View

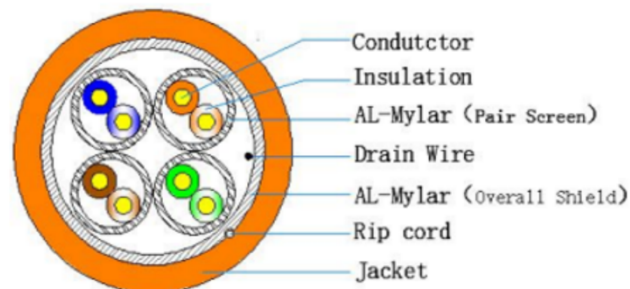

Specifications

Model	UV-F/FTP6A-300-BC23AWG-DCA-R-O
Cable	
Product model	UV-F/FTP6A-300-BC23AWG-DCA-R-O
Product specification	Cat6A, F/FTP, 4×2×0.57mm CPR Dca
Test Standard	ISO/IEC11801 ED.2 ANSI/TIA-568-C.2
Packing length	305±1 m
Rip-cord	Yes
Ambient temperature	-20°C~75°C

Conductor	
Material	OFC
AWG	23
Nom.O.D.(mm)	0.57±0.005 mm
DC resistance	≤95Ω/km
Insulation	
Material	FPE
Thickness	0.21+0.03mm
Diameter	1.35±0.05 mm
Color	Blue/White- Blue,Green/White-Green,Orange/White-Orange,Brown/White-Brown
Pitch	
Offset pitch	≤25mm
Cable pitch	≤120mm
Shield	
Pair Screen	AL-Mylar 100% Coverage
Drain Wire	0.4± 0.01TC
Overall Shield	AL-Mylar 100% Coverage
Sheath	
Material	LSZH
Fire Resistance	CPR Dca
External O.D.	7.6±0.3 mm
Thickness	0.55±0.15 mm
Color	Orange
Tensile strength	>10 Mpa
Surface Printing	
Letter height	3.0±0.3 mm
Print error / Space	1±0.005 m
Color	Black
Packing	
Packing	Reel
Once packing dimension	400mm *200mm *240mm

Ordering Info

Product Model	Description
UV-F/FTP6A-300-BC23AWG-DCA-R-O	Cat6a(FTP),305m,Overseas

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China
(Zhejiang) Pilot Free Trade Zone, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.