

## 4MP 42X LightHunter Laser Wiper Network PTZ Camera

### IPC6824EL-X42-W-VH1



## Features

- 2688 × 1520@60 fps in the main stream
- 42X optical zoom
- Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection
- automatic selection of best snapshots, supports face detection masked area
- supports front-end, supports blocklist and allowlist comparison
- People counting, supports people flow counting and crowd density monitoring
- Multi-target detection, supports human body, motor vehicle and non-motor vehicle image capture and attribute collection, realizes data visualization management, allows users to get target information for further data analysis
- Supports optical defog, self-adaptive defog
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Laser illumination: 500 m (1640 ft) distance, proportional to optical zoom of camera module
- Gyroscope stabilization for stable picture
- Supports wiper
- Power supply: AC 24 V±25%, DC 24 V±25%, PoE
- Alarm I/O: 7/2, audio I/O: 1/1
- IP67 ingress protection


# Specifications

| Model                      | IPC6824EL-X42-W-VH1  |
|----------------------------|--|
| Camera                     |  |
| Sensor                     | 1/1.8" CMOS  |
| Min. Illumination          | Color: 0.0003 Lux (F1.2, AGC ON), 0 Lux with IR  |
| Day/Night                  | IR-cut filter with auto switch (ICR)   |
| Shutter                    | Auto/Manual, 1 to 1/100000 s   |
| WDR                        | 120 dB   |
| S/N                        | >56 dB   |
| Lens                       |  |
| Focal Length               | 6.0~252mm  |
| Digital Zoom               | 16X  |
| Optical Zoom               | 42X  |
| Iris                       | F1.2 to F4.6   |
| Field of View (H)          | 59.47° to 2.20°  |
| Field of View (V)          | 35.62° to 1.24°  |
| Field of View (D)          | 73.15° to 2.60°  |
| DORI                       |  |
| DORI Distance (Detect)     | 107.2 m to 3330.6 m (351.7 ft. to 10927.2 ft.)   |
| DORI Distance (Observe)    | 42.9 m to 1332.2 m (140.7 ft. to 4370.9 ft.)   |
| DORI Distance (Recognize)  | 21.4 m to 666.1 m (70.4 ft. to 2185.4 ft.)   |
| DORI Distance (Identify)   | 10.7 m to 333.1 m (35.1 ft. to 1092.9 ft.)   |
| Video                      |  |
| Privacy Mask               | 24 areas, up to 8 areas per scene  |
| Video Compression          | Ultra 265, H.265, H.264, MJPEG   |
| Frame Rate                 | Main Stream: 4 MP (2688 × 1520), max. 60 fps<br>Sub Stream: 1080P (1920 × 1080), max. 60 fps<br>Third Stream: D1 (720 × 576), max. 60 fps  |
| Video Bit Rate             | 128 Kbps to 16 Mbps  |
| U-code                     | Support  |
| ROI                        | Support  |
| Video Stream               | Triple streams   |
| OSD                        | Up to 10 OSDs  |
| Intelligent                |  |
| Auto Tracking              | Support, target filtering: human, non-motor vehicle and vehicle  |
| Multi-target Detection     | Support  |
| Smart Intrusion Prevention | Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle) |
| People Counting            | Support people flow counting and crowd density detection   |
| Exception Detection        | Object removed, Object Left Behind   |
| Image                      |  |
| White Balance              | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2   |

|                         |   |
|-------------------------|---|
| Digital Noise Reduction | 2D/3D DNR   |
| Flip                    | Normal, Flip vertical, Flip horizontal, 180°  |
| HLC                     | Support   |
| BLC                     | Support   |
| Defog                   | Digital defog, Optical defog  |
| EIS                     | Support   |
| Image Stabilization     | EIS (Gyroscope)   |
| Events                  |   |
| Basic Detection         | Motion detection, Ultra motion detection, Tampering alarm, Audio detection, Object removed, Object Left Behind  |
| General Function        | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, Alarm input, Alarm output   |
| Audio                   |   |
| Audio Compression       | G.711U, G.711A  |
| Audio Bitrate           | 128 Kbps  |
| Two-way Audio           | Support   |
| Suppression             | Support   |
| Sampling Rate           | 16 kHz  |
| Storage                 |   |
| Edge Storage            | MicroSD, up to 512 GB   |
| Network Storage         | ANR, NAS (NFS)  |
| Illuminator             |   |
| IR On/Off Control       | Auto/Manual   |
| Wavelength              | 850 nm  |
| Illuminator             | Laser light, laser distance 500m  |
| Network                 |   |
| Protocols               | SSH, IGMP, RTP, RTCP, SMTP, IPv4, IPv6, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTSP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, 802.1x, SNMP, QoS, SSL/TLS  |
| Compatible Integration  | ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK  |
| User/Host               | Up to 32 users. 3 user levels: administrator, common user and operator  |
| Security                | Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, TLS 1.3, WSSE and Digest Authentication for ONVIF |
| Client                  | EZStation, UNV-Link, UNV-Link Pro   |
| Web Browser             | Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+  |
| PTZ                     |   |
| Number of Presets       | 1024  |
| Preset Patrol           | 16 patrols, up to 64 presets for each patrol  |
| Route Patrol            | 16 patrols, up to 32 actions for each patrol  |
| Recorded Patrol         | 16 patrols, up to 128 actions for each patrol   |
| Patrol Stay Time        | 15 s to 1800 s  |
| Preset Image Freeze     | Support   |

|                     |  |
|---------------------|--|
| Home Position       | Support  |
| Pan Range           | 360° (endless)   |
| Tilt Range          | -15° to 90° (auto flip)  |
| Pan Speed           | 0.1°/s to 180°/s   |
| Tilt Speed          | 0.1°/s to 180°/s   |
| Interface           |  |
| Audio I/O           | 1 Input: impedance 1 kΩ, amplitude 2.5 V [p-p], 1 Output: impedance 600 Ω, amplitude 2.5 V [p-p]                   |
| Alarm I/O           | 7/2  |
| Serial Port         | 1 * RS485  |
| Network             | 1 × RJ45 10 M/100 M Base-TX Ethernet   |
| Video Output        | 1 BNC (for debugging)  |
| Certification       |  |
| EMC                 | CE-EMC (EN 55032: 2015+ A11: 2020; EN IEC 61000-3-2: 2019; EN 61000-3-3: 2013+ A: 2019; EN 55035: 2017+ A11: 2020) |
| Safety              | CE LVD (EN IEC 62368-1: 2020+ A11: 2020)   |
| Environment         | CE-ROHS (2011/65/EU;(EU)2015/863)  |
| Protection          | IP67 (IEC 60529: 1989+AMD1: 1999+AMD2: 2013) ; IK10 (IEC62262; Anti-Vandalism Except for the Front Window)         |
| General             |  |
| Power               | AC 24 V±25%, DC 24 V±25%, PoE (IEEE 802.3bt)   |
| Power Consumption   | Max. 67 W  |
| Power Interface     | Wires with cold-pressed terminal   |
| Dimensions          | Ø226.7 mm × 440.3 mm (Ø8.93" × 17.33") (Ø × H)   |
| Weight              | 6.9 kg (15.21 lb.)   |
| Working Environment | -40 °C to 70 °C (-40 °F to 158 °F), Humidity: ≤ 95% RH (non-condensing)  |
| Storage Environment | -40 °C to 70 °C (-40 °F to 158 °F), Humidity: ≤ 95% RH (non-condensing)  |
| Surge Protection    | 6 KV   |
| Reset Button        | Support  |
| Heater              | Support  |
| Configurable        |  |
| P/N                 | Support  |

## Dimensions

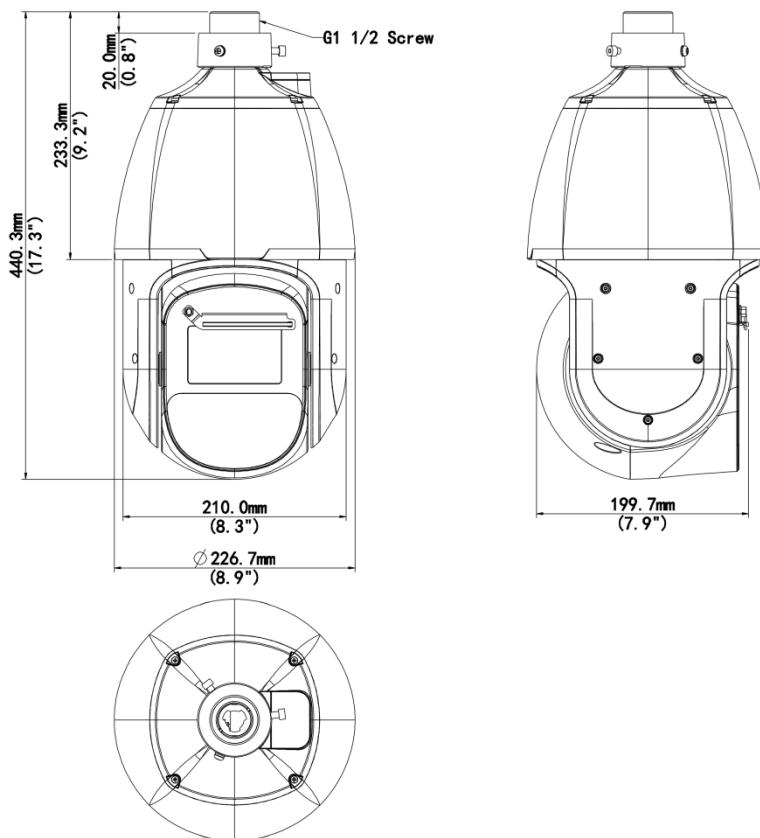

## Accessories

TR-UF45-A-IN

Dome Indoor Ceiling Mounting Pedestal



TR-UC08-A-IN

Dome Corner Mounting Bracket



TR-SE45-A-IN

Dome Ceiling Mounting Pole 500



TR-UP08-B-IN

Aluminium Alloy Pole Mounting Bracket



TR-UC08-B-IN

Aluminium Alloy Corner Mounting Bracket



TR-UP08-A-IN

Dome Pole Mounting Bracket



TR-WE45-B-IN

Dome Gooseneck Bracket



TR-JB12-IN

Dome Junction Box



TR-CE45-IN

Dome Indoor Ceiling Mounting Bracket



TR-WE45-A-IN

Long Wall Mounting Bracket for Dome



TR-SE45-IN

Dome Ceiling Mounting Pole 200

**Zhejiang Uniview Technologies Co., Ltd.** <http://www.uniview.com> overseasbusiness@uniview.com; globalsupport@uniview.com No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.