

Disk Enclosure

DEU1016-B



Features

- High density. The innovative enclosure with 477mm depth and 3U height that holds up to 16 disks, is space-saving and applicable to the standard rack-mounted scenarios.
- Power protection. Disk powered on sequentially during system startup, protection from impulse current.


Specifications

| | |
|-----------------------------|-------------------------------------|
| Model | DEU1016-B |
| Hard Disk | |
| SATA | 16 SATA Interfaces |
| Capacity | Up to 16TB for each disk |
| External Interface | |
| miniSAS | 1 |
| RS232 | 1 |
| Power Supply | AC 100~240V |
| Working Environment | |
| Working Temperature | -10 °C ~ + 55 °C (+14 °F ~ +131 °F) |
| Working Humidity | 5%~95% RH (non-condensing) |
| Power Consumption(With HDD) | < 160W(With 16 HDDs) |


Dimensions

| | |
|---------------------|---|
| Weight(Without HDD) | < 10Kg (22lb) |
| Dimensions | 482mm × 477mm× 131mm (19.0"×18.8"×5.1") |
| Height | 3U |

Dimensions

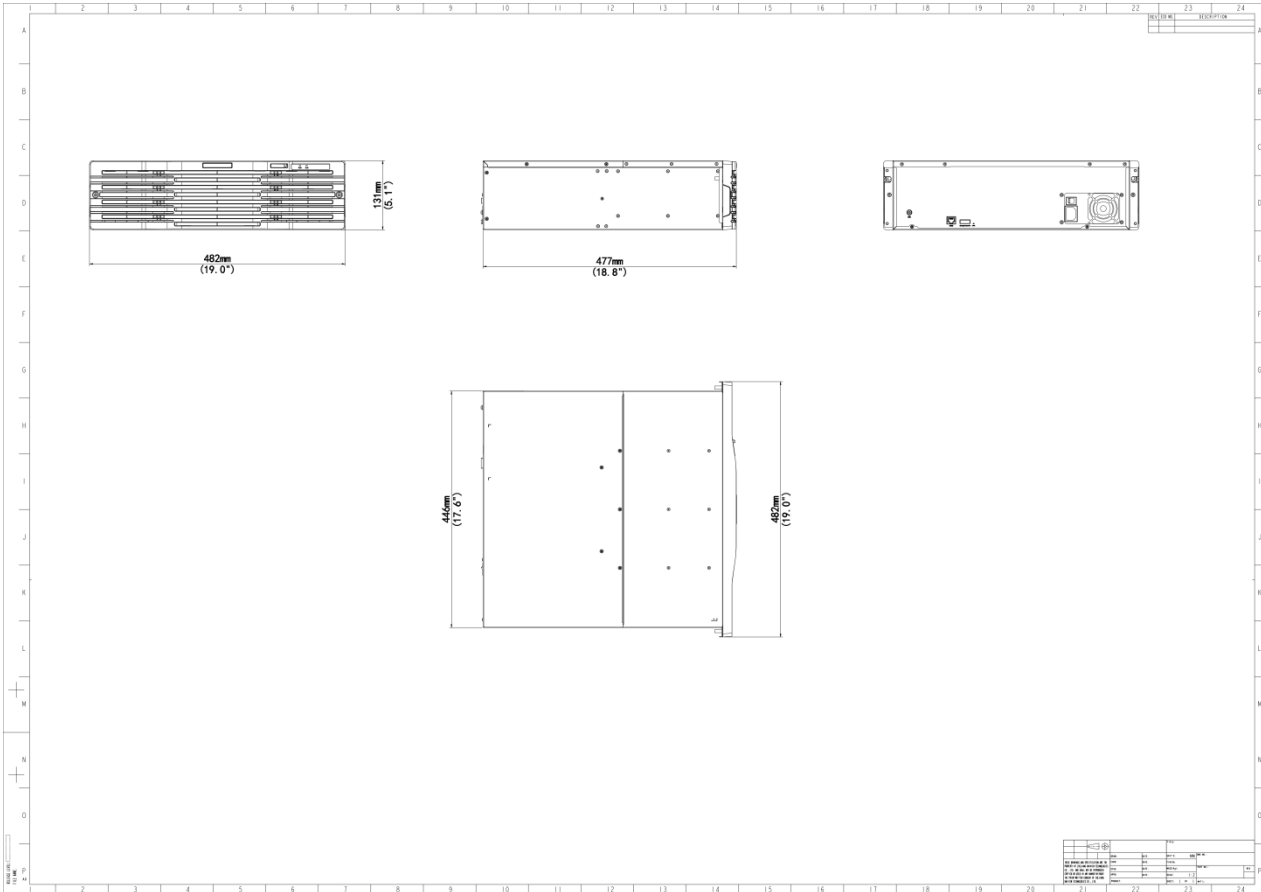

Rear Panel

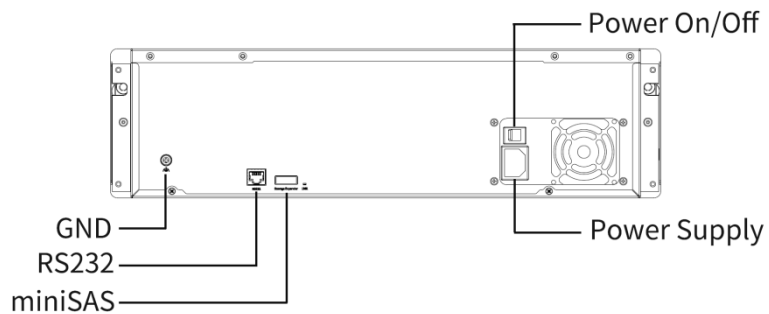

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.