

# [Datasheet]UNV LED Strobe & Xenon Flash Illuminator 20231228 (Public)

# LAMP-H25@B-OS



#### Features

- 24 high-power warm light LEDs.
- The LED flashes synchronously when the xenon light flashes.
- Adjustable flash brightness.
- Unique design and high-performance dedicated components ensure reliable operation in a variety of complex conditions.
- Long lifetime of over 10 million times.
- Stable brightness withstands fluctuations in the power supply voltage.

### **Specifications**

Model	LAMP-H25@B-OS	
BOM		
BOM	0231C1DV	
LED strobe		
Trigger mode	Strobe: TTL level/switch	
	Flash: Switch	
White light flash		

1






Color temperature	Xenon 6000±500K LED 4000±200K	
Output energy	Flash 40J to 80J	
White light flash lifetime	≥10 million times	
硬件参数		
Strobe power	34.5W@3A/40% (active power)	
Strobe illumination angle	10°	
Flash duration	300us by default	
Exposure index	40 to 64 (GN)	
Response time	≤55ms (220V)	
Interface	1 power input; 1 flash trigger input; 1 strobe trigger input	
Operating temperature	-30°C to +60°C	
Operating humidity	5% to 95% RH (non-condensing)	
Structure		
Power	AC 220V±20%, 40 to 60Hz	
Be in common use		
Weight	4.5kg	
Dimensions (L×W×H)	436.1mm*282mm*279.6mm	
Ingress protection	IP65	



#### **Dimensions**

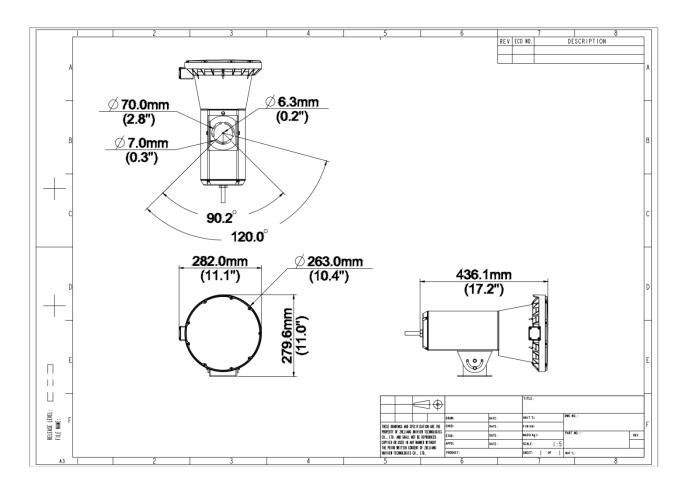

# Ordering Info

Product Model	Config	Description
LAMP-H25	B-OS	LED Strobe & Xenon Flash Illuminator

#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseas business @uniview.com; global support @uniview.com

http://www.uniview.com

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.