

Apartment Door Station OEU-301S-HMKA



Overview

OEU-301S-HMKA apartment door station is one of the terminal equipment of the digital building intercom system, with functions of video intercom, security alarm, video surveillance, etc., providing a safe and comfortable living environment for residents. It can be widely used in apartment building system.


Features

- Delivered with a recess box for recess mount.
- Built-in heating module supports operation at a very low temperature.
- Metal casing.
- Supports batch configuration.
- Supports call and intercom with the connected indoor stations and APP.
- Supports video monitoring, security alarm, and tamper alarm.
- When used with a magnetic lock, it is recommended to use a dedicated access control power supply.
- Built-in IC card reader.

Specifications

Model	OEU-301S-HMKA
Basic Business	
WDR	Support DWDR
Protocol	Private protocol
Button	15 buttons with braille Buttons layout: Row 1: 1/2/3 Row 2: 4/5/6 Row 3: 7/8/9 Row 4: */0/# Row 5: Management center/Call/Cancel
Network protocol	TCP/IP, IPv4, HTTP, RTP, RTSP, NTP
Specification Index	
Card Capacity	10000
Maximum Connected Indoor Station	500
Hardware Specification	
FOV	Horizontal: 106.9° Vertical: 56.9° Diagonal: 127.9°
Power Consumption	PoE: 10.73W DC12V: 8.62W
Volume Adjustment	Support
Audio Quality	Noise suppression, echo cancellation, AGC
Audio Input	1 x Built-in omnidirectional microphone
Audio Output	1 x Built-in speaker
Audio Compression Bitrate	128Kbps
Power Supply	DC12V ±25%, IEEE802.3af PoE power supply
Operating System	Linux
Illuminator	IR light (adaptive)
Screen Size	3.97 inch
Weight	928g
Mount Method	Wall mount
Interface	Power*1, network port*1, RS485*1, IO input*4, IO output*2, door lock*2 (electric lock/door magnet), door opening button*2, door magnet*2, tamper button*1
Network	100Mbps network port, supports IEEE802.3af PoE power supply
Dimensions (L x W x H)	125mm*358mm*53mm
Operating Environment	-40°C to 60°C, 10% to 90%, noncondensing, outdoor
Operating Frequency	13.56MHz
Compliance	
NDAA Compliant	Support

Dimensions

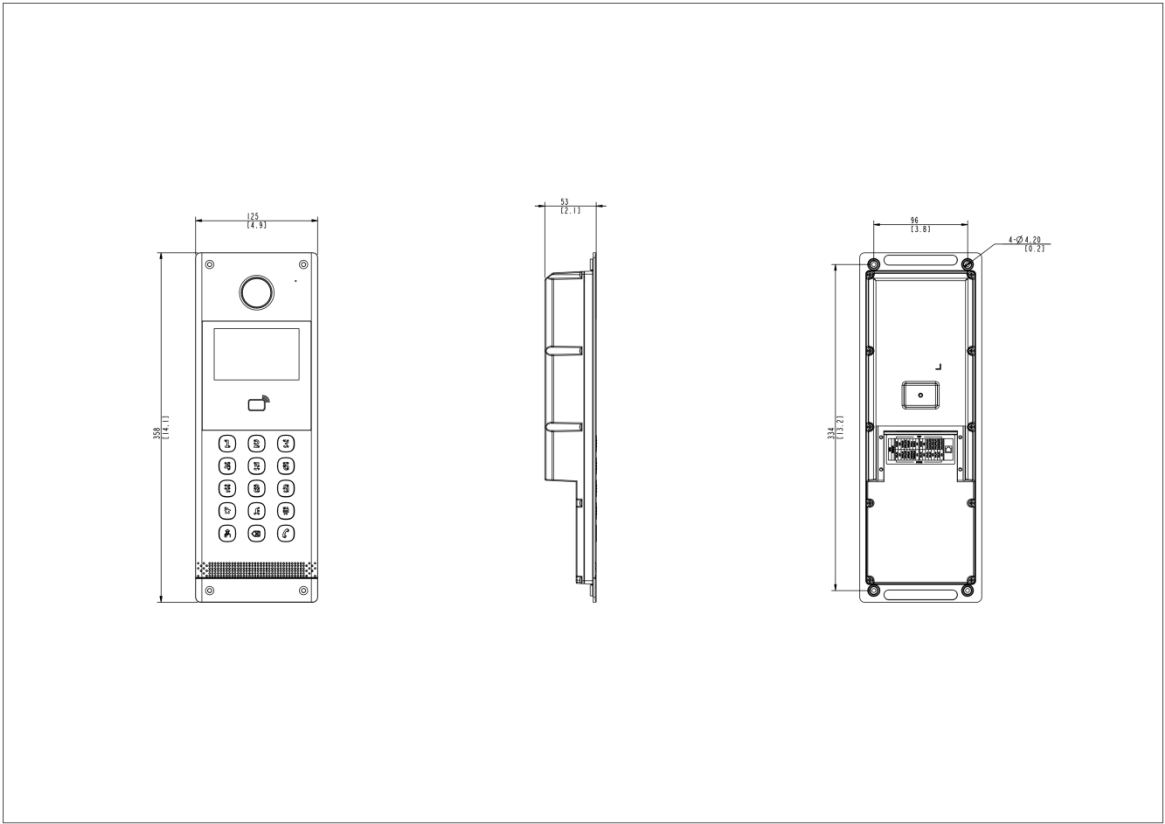

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2024-2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.