

Desktop Mifare Card Enroller

OEC-W2D-M



Overview

OEC-W2D-M-NB desktop Mifare card enroller can read card numbers and write data to the specified sectors of a card to achieve both read and write functions. The device is often used with UNV Guard and EZAccess.

Features

- Supports USB power supply.
- Supports Mifare card.
- Supports reading card numbers and writing data to a card's specified sectors.

Specifications

Model	OEC-W2D-M	
Hardware Specification		
Material	PC	
Weight	0.17kg (with package), 0.058kg (net weight)	
Mount Method	Desktop mount	
Power Supply	Voltage: DC 5V (powered by USB), current ≤ 116mA	
Operating Frequency	13.56MHz	
Reading Distance	IC card: ≤ 3cm	
Operating Environment	Temperature: -30°C to 65°C, humidity: 10% to 90%	
Dimensions (L x W x H)	110mm*65mm*24mm	


1

unv		DATASHEE
Interface	USB (plug and play, driver-free)	
Basic Business		
Card Protocol	ISO 14443-A, ISO 14443-B	
Reading Time	< 1s	
Data Format	10-digit decimal card number	
Specification Index		
Application Scenario	Indoors	

Ordering Info

Product Model	Description
OEC-W2D-M	Desktop Mifare Card Issuer

Dimensions

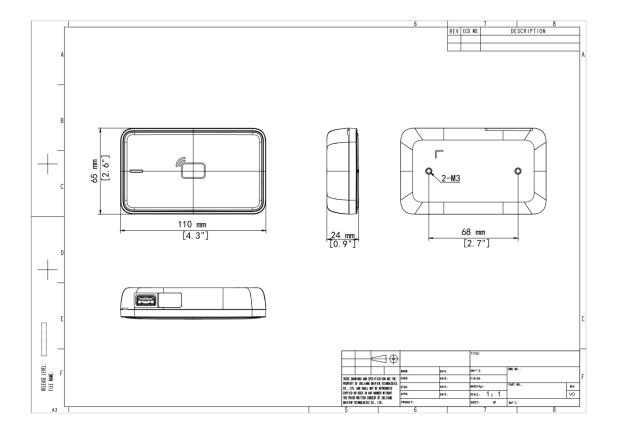





Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.