


OFG8501 Swing Barrier

OFG8501

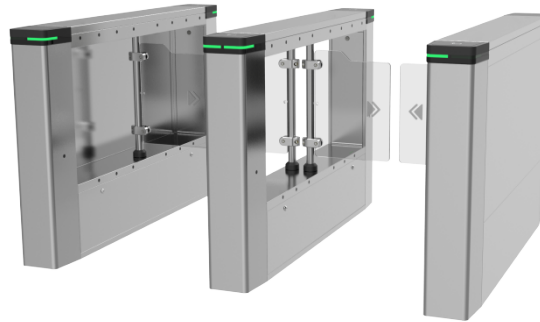

Overview

OFG8501 swing barrier is designed for smart access control. It can work with UNV smart terminals to perfectly integrate UNV smart technology into barrier gates to achieve precise access control and resolve issues plaguing traditional barrier gates such as illegal access using credentials of authorized persons. It supports multiple door opening modes such as authentication (QR code, IC card), induction, and normally open. This product is made of austenitic stainless steel; has a simple and elegant design; adopts advanced movement production technology to ensure long-term stable operation; and can be widely used in transportation, parks, universities, justice, energy, medical care and other industries.

Features

- Powerful and stable control core
- Advanced movement structure and high-quality brushless DC motor realize precise control, stable operation and long lifetime.
- Cutting-edge motor control technology, which integrates closed-loop control system, DSP-based intelligent motor control system, and self-developed motor control algorithm to achieve precise control and positioning of barriers with stable performance.
- All-round security design
- Ensures safety by triple intelligent anti-pinch technologies: IR detection, impact detection, and current detection.
- Safety voltage below 24V prevents electric shock.
- The barrier can remain open to allow unobstructed access in case of emergency.

- The barrier is unlocked in case of power failure to allow unobstructed access.
- Allows flexible selection of normally open or normally closed and adjustment of barrier opening/closing speed to suit various scenarios.
- Full-fledged IR light curtains
- 16 pairs of IR light curtains with matrix cycle scanning control improve detection accuracy.
- Sensitive detects illegal access such as reverse access and tailgating (with a tailgating accuracy of 2cm) and triggers alarms through sound, light, etc.
- Alarms can be uploaded to the back-end management system through the serial port, and can be linked with other security systems.
- Easy to install and maintain
- Easy installation with only 3 cables.
- Automatically detects malfunctions and triggers alarms for user-friendly maintenance and use.
- Other features
- Supports device configuration such as working mode, control mode, and door opening time on the control panel using numeric keys.
- Simple and convenient full-digital adjustment.
- Multiple I/O interfaces for various external devices.
- Supports device maintenance via network including troubleshooting, event management, passing mode configuration, and movement control.
- Supports people counting by IR detection and data uploading to the management platform for statistics.
- Supports detecting events such as tailgating, reverse access and intrusion and triggering alarms, and reporting the alarm records to the management platform.

Specifications

Model	OFG85 01-R-Y P65-A	OFG85 01-L-Y P65-A	OFG85 01-M-Y P65-A	OFG85 01-R-Y P75-A	OFG85 01-L-Y P75-A	OFG85 01-M- YP75- A	OFG85 01-R-Y P95-A	OFG85 01-M- YP95- A	OFG85 01-L-Y P95-A	OFG85 01-R-Y P105-A	OFG85 01-M- YP105- A	OFG85 01-L-Y P105-A
Hardware Specification												
Motor	Brushless DC motor											
The number of holes	L: 1; M: 2; R: 1											

Lane width	650-1050mm (The specific width is subject to the model number)
Barrier material	10mm PMMA
IR detector	16 pairs
Dimensions (L×W×H)	1500mm*190mm*960mm
Weight	L: 50KG M: 56.9KG R: 51.85KG
Pedestal material	Wall thickness 1.2mm, top cover 1.5mm, 304brushed stainless steel
Power supply	220V input; 24VDC/3A, 12VDC/7A output
IO	Smart terminal*2+remote control*2+fire*2+linkage*2 +door opening button*2
Interface	RS485×1, RS232×1, network interface, CAN
Voice	Built-in amplifier and speaker
Indicator color	Red/green

Alarm mode	Audible and visual alarm
Retriggered motion detection	Reverse break-in detection
Specification index	
Closing accuracy	$\leq 1^\circ$
Anti-pinch detection	Anti-pinch by IR detection, impact detection, and current detection
Throughput	30 to 60 people per minute, depending on the foot traffic and passing mode
Operating environment	Operating humidity: < 95%, non-condensing; operating temperature: -20°C to 60°C; outdoor shade
Power consumption	Standby: 30W, operating: 50W
MCBF	6 million times

Fire alarm link age	Automatic door opening for unobstructed access in case of power failure.
---------------------	--

Ordering Info

Product Model	Description
OFG8501-L-YP65-A	Swing Speed Gate(Left Side Machine)
OFG8501-L-YP75-A	Swing Speed Gate(Left Side Machine)
OFG8501-L-YP95-A	Swing Speed Gate(Left Side Machine)
OFG8501-M-YP65-A	Swing Speed Gate(Intermediate Machine)
OFG8501-M-YP75-A	Swing Speed Gate(Intermediate Machine)
OFG8501-M-YP95-A	Swing Speed Gate(Intermediate Machine)
OFG8501-R-YP65-A	Swing Speed Gate(Right Side Machine)
OFG8501-R-YP75-A	Swing Speed Gate(Right Side Machine)
OFG8501-R-YP95-A	Swing Speed Gate(Right Side Machine)
OFG8501-L-YP105-A	Swing Speed Gate(Left Side Machine)
OFG8501-M-YP105-A	Swing Speed Gate(Intermediate Machine)
OFG8501-R-YP105-A	Swing Speed Gate(Right Side Machine)

Accessories

OEC-R3H-M

Wall Mounted Mifare Card Reader



Dimensions

Aggregate product size diagram using "main model" as an example

