


# UTP Category 5E Cables (0.50mm)

CAB-LC2100A-IN

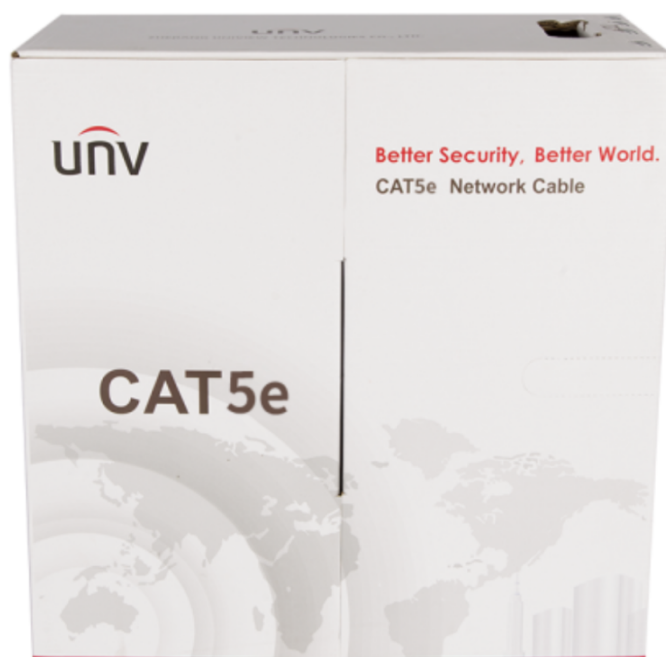

## Specifications

Model	CAB-LC2100A-IN
Cable	
Product model	CAB-LC2100A-IN
Test Standard	YD/T1019-2013
Product specification	HSYV-5e 4×2×0.50
Packing length	305±1 m
Ambient temperature	-20°C~60°C
Rip-cord	Yes
Conductor	
Material	Solid-Bare Copper
AWG	24

Nom.O.D.(mm)	0.5±0.005 mm
DC resistance	≤95 Ω/km
<b>Insulation</b>	
Diameter	0.9±0.05 mm
Material	HDPE
Thickness	0.2±0.02 mm
Color	Blue/White- Blue,Green/White-Green,Orange/White-Orange,Brown/White-Brown
<b>Pitch</b>	
Offset pitch	≤25 mm
Cable pitch	≤140 mm
<b>Sheath</b>	
Material	PVC(complies RoHS/REACH)
Thickness	0.55±0.05 mm
External O.D.	5.1±0.3 mm
Tensile strength	>13.5 Mpa
Color	Gray(RAL7046)
<b>Surface Printing</b>	
Color	Black
Letter height	3.0±0.3 mm
Print error / Space	1±0.005 m
Case number	Yes
<b>Packing</b>	
Packing	Carton
Once packing dimension	350mm*216mm*350mm
Twice packing dimension	370mm*460mm*370mm
Twice packing quantity	2 cases

## Ordering Info

Product Model	Description
CAB-LC2100A-IN	Cat5e 305m UTP Network Cable (OFC 0.5mm grey)

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.