

Lithium Battery SLR-R-H-IN



Features

- Modular design for easy battery assembly, hanging design for easy solar panel installation.
- · Built-in high-safety, high-reliability, and long-life lithium battery cell is suitable for a wide range of application scenarios.
- Built-in self-developed high-efficiency solar controller realizes faster charging.
- Visual status indicator allows for easy understanding of the product's operating status.
- Multiple protection functions such as high and low battery temperature protection, overcharge protection, undervoltage protection, etc.
- Metal casing, windproof and rainproof, capable of withstanding harsh outdoor environments.
- Built-in heating module can be turned on in a low temperature environment, effectively protecting the battery life and ensuring the safety of charging.

Specifications


Model	SLR-R100-H-IN	SLR-R200-H-IN	
Specification			
Battery capacity	50Ah	100Ah	
Rated energy	160Wh	320Wh	
Limited charge voltage	7V		
Output voltage	9V to 12.6V		
Maximum output current	2A		
Input interface type	4-pin quick connector (for battery switch)		
Output interface type	DC12V circular connector		
RS485	Support		
Operating temperature	-20 °C to 55 °C (discharge)-20 °C to 45 °C (charge)		

1



Dimensions	419.2*118*336.5mm		
Weight	3.9kg	4.6kg	
Protection function	High/low temperature protection, overcharge protection, undervoltage protection		
General			
Suitable pole diameter	67mm to 110 mm		

Dimensions

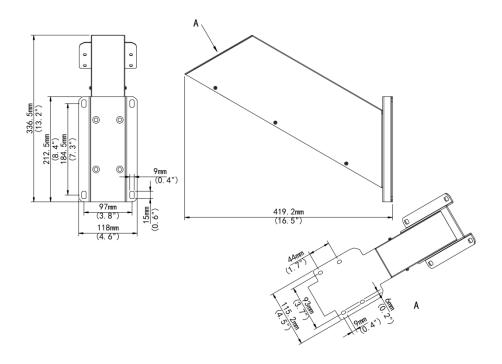

Zhejiang Uniview Technologies Co., Ltd.



http://www.uniview.com



overse as business @uniview.com; global support @uniview.com



 $No.\ 369, Xietong\ Road, Xixing\ Sub-district, Binjiang\ District, Hangzhou\ City, 310051, Zhejiang\ Province, Chinang City, C$ (Zhejiang) Pilot Free Trade Zone, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

^{*}Product specifications and availability are subject to change without notice.

^{*}Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.