

# OEI-371S-H-W Indoor Station

#### **OEI-371S-H-W**



### Overview

OEI-371S-H-W indoor station is one of the terminals in the digital building intercom system, with functions of video intercom, security alarm, network camera monitoring, etc., providing a safe and comfortable living environment for residents. It can be widely used in building systems such as smart communities, villas, and office parks

#### **Features**

- Rugged ABS casing and glass panel.
- 1024\*600 HD touch screen.
- Batch configuration transfer.
- Remote opening of linked door stations, one-key opening.
- Network camera monitoring, security alarm.

# **Specifications**

Model	OEI-371S-H-W
Hardware Specification	
Power Supply	DC12V±25%,IEEE802.3af, Standard PoE
Power Consumption	<10W

1




Screen	7-inch ultra-thin TFT LCD screen	
Screen Resolution	1024×600	
Operation System	Linux	
Audio Quality	Noise suppression, echo cancellation and AGC	
Audio Input	1 built-in omnidirectional microphone	
Audio Output	1 built-in speaker	
Audio Compression Standard	MP3 G711	
Audio Compression Bitrate	128Kbps	
Interface	Power*1, network*1, Wi-Fi*1, RS485*1, IO output*2, IO input*8, TF card slot*1	
Network	100Mbps network port, supports IEEE802.3af PoE power supply	
Weight	377g	
Dimensions (L x W x H)	193.2mm×143.4mm×24.3mm	
Operating Environment	-10°C to +55°C, 10% to 90%, non-condensing, indoor	
Basic Business		
Protocol	UNV private protocol	

# Ordering Info

Product Model	Description
OEI-371S-H-W	7-Inch Touch Screen Wall Mounted Indoor Station



## **Dimensions**

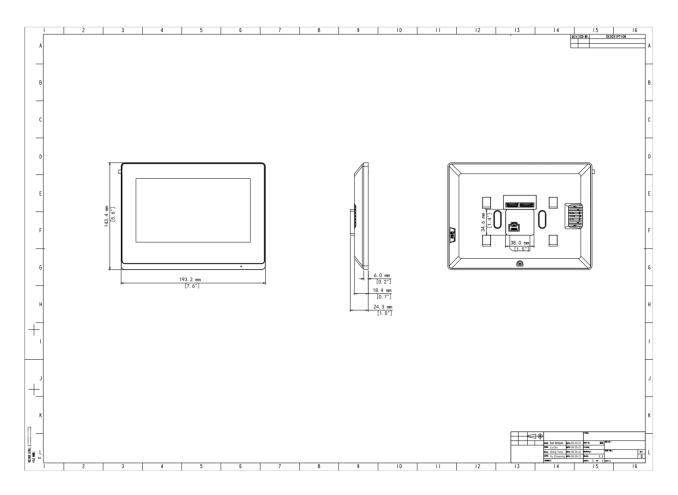

#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overse as business@uniview.com; global support@uniview.com

http://www.uniview.com

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

 ${}^{*}\operatorname{Product}$  specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.