


Ethernet PoE Switches Datasheet

SW-2226-LP

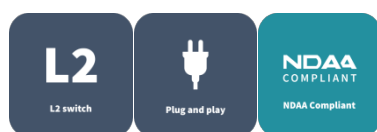

Features


- Multiple working modes to address your business needs: Normal, Secure and Surveillance
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

Specifications

Model	SW-2226-LP
Hardware Specification	
Ports Type	24×100Mbps PoE ports (RJ45)+ 1×1000Mbps GigaEthernet ports +1×1000Mbps Combo ports
Switching capacity	8.8 Gbps
Power Supply	AC: 100 to 240V, 50/60Hz
Forwarding performance	6.55Mpps
MAC	16K
PoE Standard	IEEE 802.3af, IEEE 802.3 at
Packet Buffer	4 M bit
PoE Mode	ModeB (4578)
Max.PoE Power	Max capacity:250W

	Max capacity for single port: 30W
Prior Ports	1 to 8
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Cooling Fans	0
Max.Power	270W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Operating Humidity	10% to 90% (noncondensing)
Indicator	POWER: Steady on: AC input is normal Off: No AC input PoE: Off: No PoE power supply Steady on: PoE power supply is normal PoE-MAX: off : The POE power supply power of the whole machine is less than 80% of the specification Steady on : The POE power supply power of the whole machine is greater than 85% of the specification LINK/ACT: Off: No link Steady on: Linked Flashing: Transmitting data
Dimensions (W×D×H)	440 × 189.8 × 44 mm
Weight	2.15KG
Working Mode	Default (Normal mode) : All ports can communicate with each other, EXTEND (Surveillance mode): Transmission distance up to 250 meters
Compliance	
NDAA Compliant	Support

Dimensions

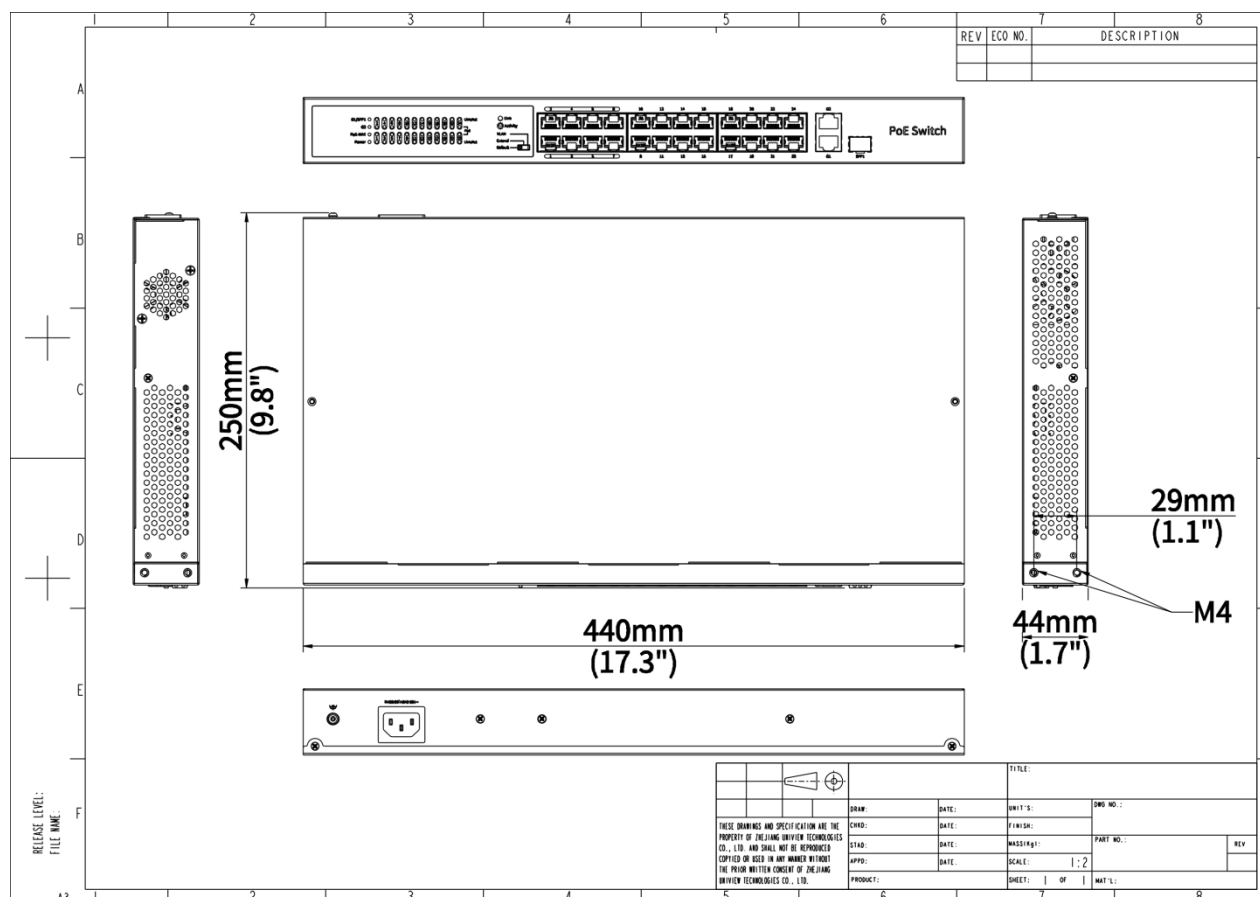

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.