


# OER-SR12, OER-SR22, OER-SR42 Access Controller

OER-SR12, OER-SR22, OER-SR42

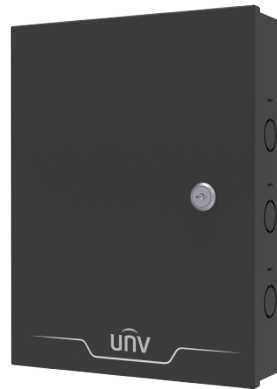

## Overview

OER-SR12, OER-SR22, OER-SR42 are high-performance and highly reliable access controllers. The products provide TCP/IP wired network communication interfaces and specialized access control and management functions to fit various complex access control scenarios.

## Features

- TCP/IP communication, secure and reliable.
- Large capacity, max 42,000 cards and 200,000 events.
- Different mounting holes for easy installation.
- Supports remote upgrade.
- Supports real-time monitoring setup.
- Supports issuing cards using card readers.

## Specifications

Model	OER-SR42	OER-SR12	OER-SR22
Hardware Specification			


Dimensions (L x W x H)	235mm x 305mm x 76mm		
Weight	2.3KG	2.2KG	2.2KG
Door Control	4 doors	1 door	2 doors
Card Reader	8	2	4
Wiegand Input Interface (Max DC14V Withstand Voltage)	8	2	4
Wiegand Format	WG18/26/34/66		
Relay Output	4 sets (7A)	1 set (7A)	2 sets (7A)
Door Magnetic Port	4	1	2
Fire Module Expansion Port	1		
Operating Environment	Indoor (-10°C to +65°C)		
Power Supply	AC 100V to 240V(50Hz or 60Hz)		
Mount	Wall mount		
<b>Basic Business</b>			
Communication Mode	TCP/IP		
<b>Specification Index</b>			
Card Capacity	42000		
Event Capacity	200000		

## Ordering Info

Product Model	Description
OER-SR12	Single Door Recognition Access Control Controller
OER-SR22	Double Doors Recognition Access Control Controller
OER-SR42	Four Doors Recognition Access Control Controller

## Dimensions

Aggregate product size diagram using OER-SR42 as an example

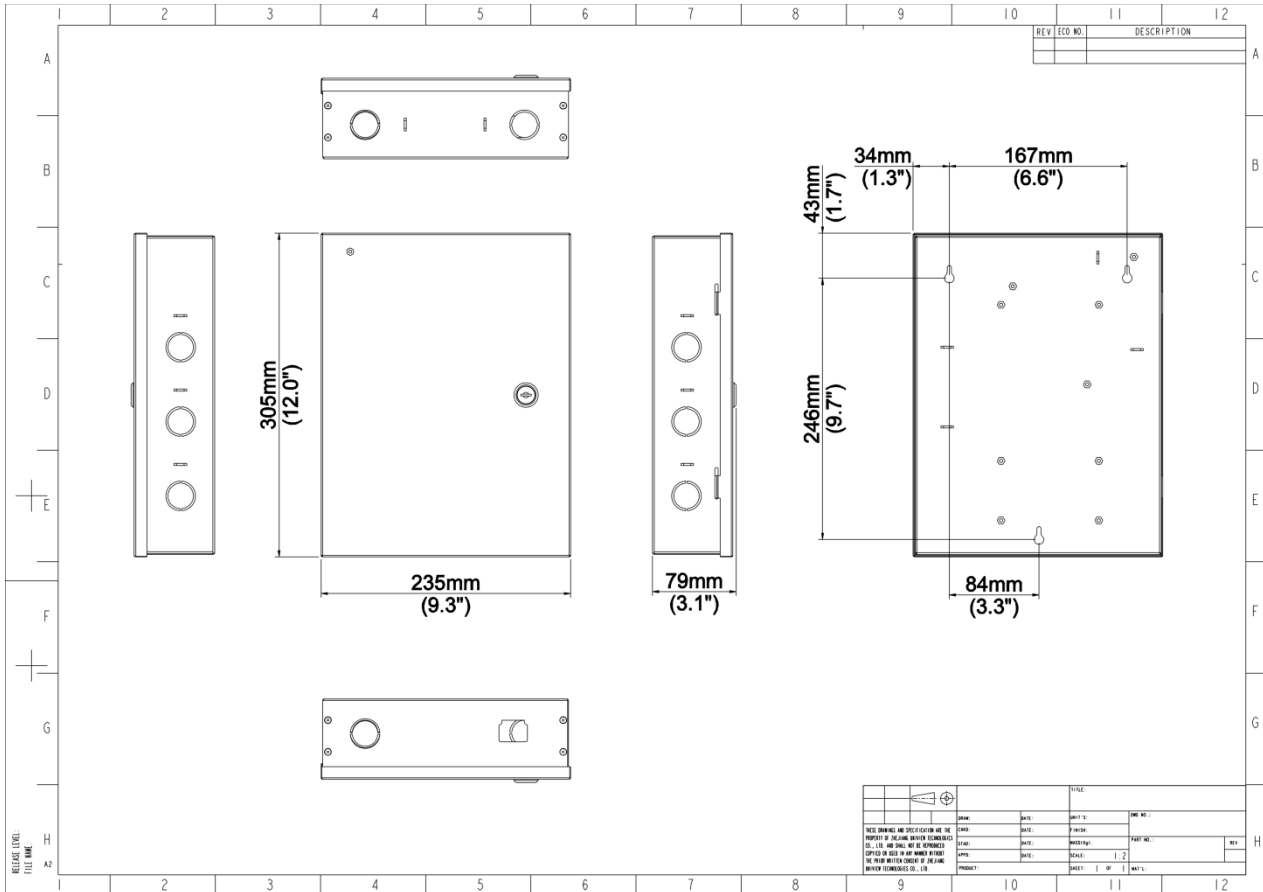

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.