

# **Unmanaged Ethernet POE Switches**

#### NSW2010-10T-POE-S-IN



### **Features**

- Ocomply with IEEE 802.3, IEEE 802.3u standards.
- Ethernet port supports 10/100Mbps.
- Flow control mode: full-duplex adopts IEEE 802.3x standard, half-duplex adopts Back pressure standard,
- Support port auto flip (Auto MDI/MDIX),
- Automatically supplied to adaptive devices.
- Panel indicator monitoring status and help failure analysis.
- Support for VLAN mode, Normal mode and Extend mode.


### **Specifications**

Model	NSW2010-10T-POE-S-IN
Hardware Specification	
Ports Type	10×10/100Mbps network ports (RJ45), including 8 PoE ports
Standards	IEEE802.3, IEEE802.3u, IEEE802.3x,
Switching capacity	2 Gbps
Forwarding performance	1.49Mpps
Packet Buffer	768K bit
MAC	2K
Weight	0.61 kg
Max.Power	101W
Max.PoE Power	Max capacity: 96W
	Max capacity for single port: 30W
	Mode A: 1/2+, 3/6-

1

unv		DATASHEET	
Dimensions (W×D×H)	Product : 200 x 118 x 44mm		
	Package : 245*190*60mm		
Cooling Fans	0		
Working Temperature	-10°C to 50°C (14°F to 122°F)		
Operating humidity	10%~90% (noncondensing)		
Working Mode	Default(Normal mode) : All ports can communicate with each other.,		
	EXTEND(Surveillance mode): Transmission distance up to 250 meters., VLAN(Secure mode):		
	Downlink ports can communicate only with uplink ports.		
Indicator Light	PWR (power supply), SW (DIP), 1-6 Green (Link&Data)		
Packing			
Packing	Carton MEAS: 520*320*400mm		
	Packing Qty: 20 units		
	Packing Weight: 18.8KG	Packing Weight: 18.8KG	

## **Dimensions**

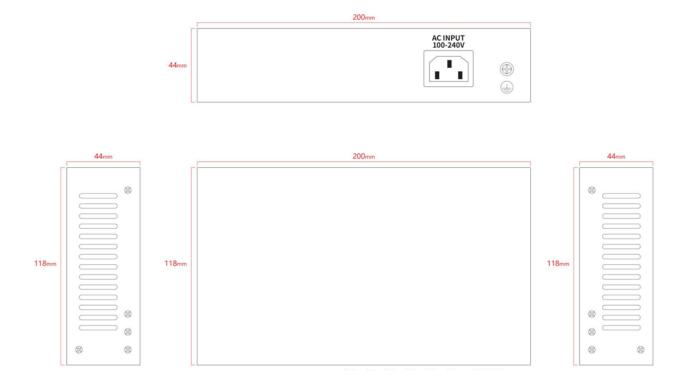



#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overse as business@uniview.com; global support@uniview.com

http://www.uniview.com

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.