

Unmanaged Harsh PoE Switch ISW2000-4T2GP-POE-IN



Features

- PoE supports IEEE 802.3af/at standards and provides a maximum output of 30W for each port.
- Multiple working modes to address your business needs: VLAN, CCTV.
- VLAN mode: Downlink ports can communicate only with uplink ports.
- CCTV mode: The port is forced to speed down to 10Mbps transmission rate. Data transmission and power supply distance up to 250 meters. Downlink ports can communicate only with uplink ports.
- Supports IEEE802.3x full-duplex flow control and Backpressure half-duplex flow control.
- Panel indicators monitor working status and assist in fault analysis.
- Operating temperature: -30°C to 65°C.

Specifications


Model	ISW2000-4T2GP-POE-IN
Hardware Specification	
Standards	IEEE802.3x IEEE802.3u、IEEE802.3z、IEEE802.3ab、IEEE802.3x、IEEE802.3af、IEEE802.3at
Ports Type	4*10/100Mbps RJ45 Ports
	2*1000Mbps SFP Slots
Switching capacity	4.8Gbps
Jumbo Frame	16KBytes
Forwarding performance	3.57Mpps
Packet Buffer	2 M bit
MAC	4K
Transfer Mode	Store-and-forward
Dimensions (W×D×H)	145*109*58mm

,



Operating Temperature	-30°C to 65 °C
Operating Humidity	5% ~ 95% non-condensing
Storage Humidity	0% ~ 95% non-condensing
Power Supply	DC:48-57V, powered by adapter. Max.Power 75W.
	Adapter: AC100-240V, 50/60Hz
Indicator	PWR, LNK/ACT, PoE,DATA
Electrostatic Standard	Contact ±6KV, Air ±8KV
Surge Protection	Differential mode ±2KV Common mode ±4KV

Installation

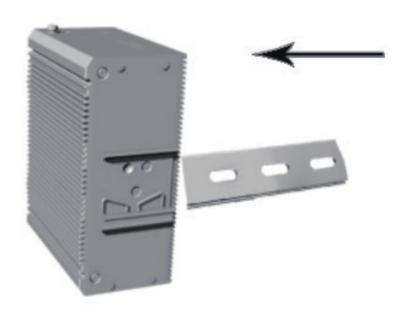

Zhejiang Uniview Technologies Co., Ltd.



http://www.uniview.com



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



^{*}Product specifications and availability are subject to change without notice.

^{*}Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.

