관리형 이더넷 스위치

NSW5130-48GT4XP-IN





주요 특징


- NSW5130 시리즈는 비멀티플렉스 SFP 인터페이스와 호환되어 고밀도 기가비트 액세스를 가능하게 하고 사용자의 투자를 보호합니다.
- 다중 서비스. NSW5130 시리즈는 IGMP, IGMP 스누핑, FRRP(빠른 링 네트워크 복구) 프로토콜, FLRP(빠른 링크 복구 프로토콜)와 같은 멀티캐스트 프로토콜을 지원합니다.
- 건전한 보안 제어 정책. NSW5130 시리즈는 MAC 주소, 802.1x, 포털을 기반으로 여러 인증 모드를 제공합니다. 사용자 계정, IP, MAC, VLAN, 인터페이스와 같은 사용자 ID의 동적 또는 정적 바인딩을 지원합니다.
- 풍부한 QoS 정책. NSW5130 시리즈는 인터페이스에서 트래픽 식별을 지원합니다. 소스 MAC 주소, 대상 MAC 주소, 소스 IP 주소, 대상 IP 주소, TCP/UDP 포트 번호, 프로토콜 유형 및 VLAN을 기반으로 여러 스트림 분류를 제공합니다.
- 뛰어난 관리. SNMPv1/v2/v3 표준 네트워크 관리 프로토콜과 호환되는 NSW5130 시리즈는 CLI 명령줄과 웹 관리 인터페이스를 제공합니다.

사양

Model	NSW5130-48GT4XP-IN
Hardware Specification	
Ports Type	48*10/100/1000Mbps RJ45 port, 4*10Gbps SFP+ port
Switching capacity	176Gbps
Forwarding performance	130.9Mpps
MAC	24K
Max.Power	39W
Power Supply	AC100-240V
Cooling Fans	1
Indicator	PWR, LINK/ACT
Dimensions (W×D×H)	440mm*330mm*44mm
Weight	3.5kg
Operating Temperature	0℃~40℃
Operating Humidity	5% to 95%, non-condensing
Software Specification	
MAC	Support static, dynamic, black hole MAC entries Support source MAC address filtering
Ethernet	Support port aggregation, port mirroring, RSPAN, port isolation, port traffic identification
VLAN	Support 4K 802.1Q VLAN Support VLAN based on MAC/ IP subnet/authentication policy/interface VLAN Support GVRP Support QinQ
Maintenance	Support real-time temperature detection and alarm Support SNMP, CLI, Web management, Support local and remote output of system logs, operation logs, debugging information
Security	Support authentication modes based on MAC, 802.1x, and Portal; support local and support local and centralized authentication Support dynamic ARP detection, one-click ARP binding, authorized ARP, ARP source suppression, ARP source address inspection Support port isolation, port security Support broadcast storm suppression Support SSH2.0
QoS	Support 8 priority queues per port Support traffic classification based on 802.1p/DSCP/TOS Support speed limit on ports and streams Support SP, WRR, SP + WRR queue scheduling
Reliability	Support STP, RSTP, MSTP
DHCP	Support DHCP Client, DHCP Server, DHCP Snooping
Multicast	Support IGMP Snooping

IP Route	Support static routing, RIPV1/V2, OSPFv1/v2, Policy-Based Routing

크기

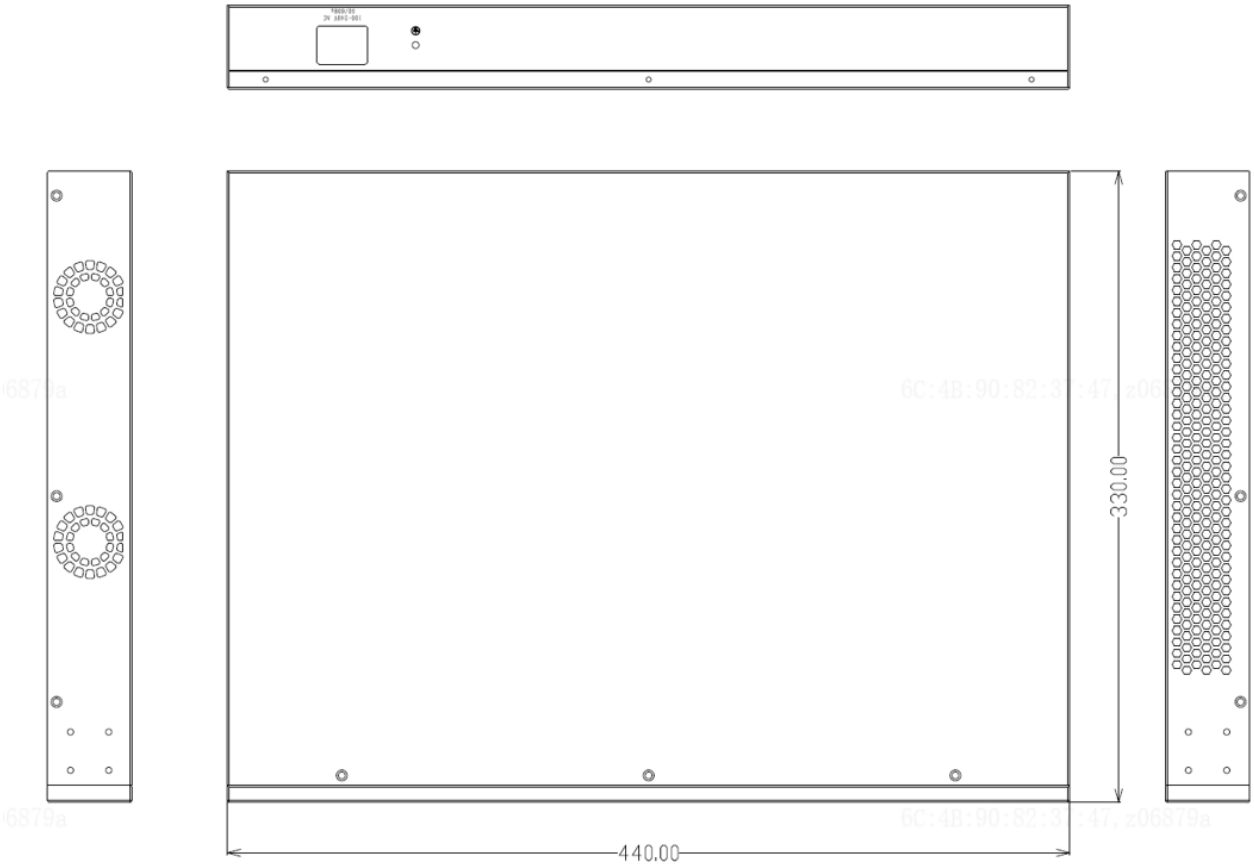

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.